

For Compact Tractors 20 To 50 Horsepower


"E" SERIES

Agricultural & Horticultural

Ideal for preparation of seedbeds, renovation of pastures, orchards, vineyards and mulching-in cover crops and stubble. Provides uniform mixture through-out cultivated depth. Produces loose textured soil that holds moisture, reduces erosion.

Light Industrial

Clears and cleans up land. Eliminates fire hazards by tilling in dried grass. Mixes and blends soils and aggregates for soil stabilization in roads, driveways, parking areas, side-walks and pathways.

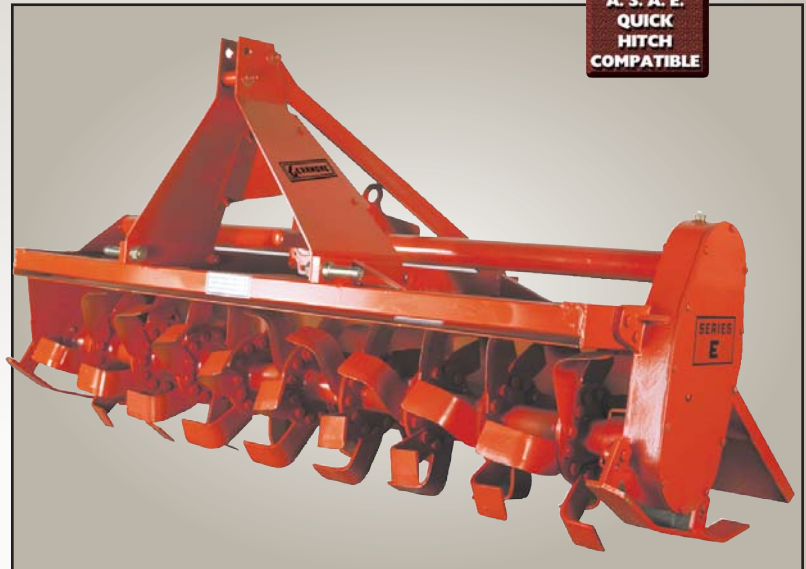

FEATURES:

- Connects to 3-point., Cat. 1, 540 R.P.M. tractors
- All gear, final drive
- Rugged construction for long life
- Strong, balanced rotorshaft
- Large bearings with protective seals
- Oversize shafts and gears
- Heat treated, long wearing tines
- 6 - L shaped tines per flange
- Well-balanced to eliminate vibration
- Adjustable skids for depth control
- Tailboard with chain adjustments
- Torque tube frame to absorb shock loads
- Driveshaft with slip clutch

SPECIFICATIONS:

MODEL NO.	TILLING WIDTH	OVERALL WIDTH	NO. OF TINES	APPROX. HORSEPOWER	WT.
E48	48"	53"	36	20 to 35 HP	600#
E60	60"	65"	42	25 to 40 HP	690#
E72	72"	77"	54	35 to 50 HP	780#