


Brackets For Loader Pin-On & JD Quick Attach



**ULF-2242
Shown**

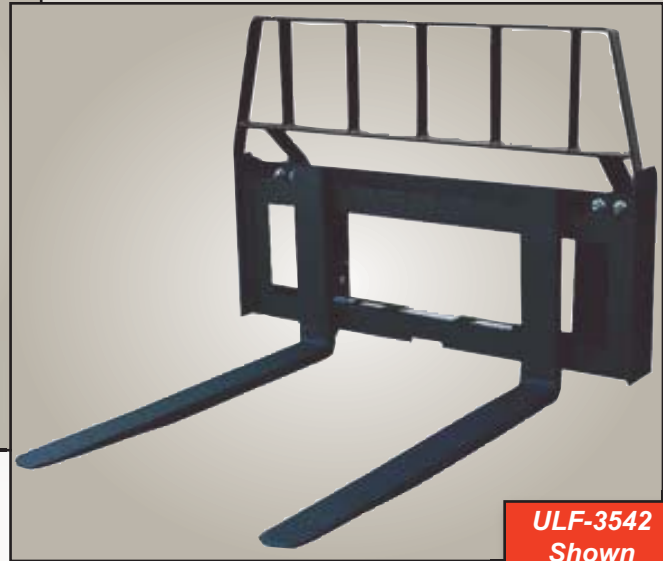

**ULF-3542
Shown**

FEATURES:

- ❑ Load capacities of 2250 & 3750 lb.
- ❑ Fits compact and utility loaders
- ❑ Forks are constructed of Boron steel and heat treated
- ❑ Adjustable and lockable rail style forks
- ❑ Equipped with high visibility load guard

These handy fork attachments turn your tractor/loader into a low cost forklift. The forks feature lockable tines and slotted rails. The solid tines are made of Boron Steel and then are heat treated. Two mounting styles are available; direct pin-on and JD quick attach.

SPECIFICATIONS:

MODELS:	ULF-2242	JLF-2242	ULF-3542	ULF-3548
Lift Capacity:	2250 lbs.	2250 lbs.	3750 lbs.	3750 lbs.
Fork Length:	42"	42"	42"	48"
Tine Size:	1 1/4" x 3" Solid	1 1/4" x 3" Solid	1 3/8" x 4" Solid	1 3/8" x 4 1/2" Solid
Loader Mounts:	Fits many compact loaders that measure between 28 1/4" ID & 47 1/4" OD with 3/4" or 1" pins	Fits John Deere compact loaders with quick-change attachment carrier	Fits many loader frames between 32" ID & 48" OD with 1" or 1 1/8" pins	Fits many loader frames between 32" ID & 48" OD with 1" or 1 1/8" pins
Weight:	280#	280#	370#	385#



WARNING: The loader mounted fork attachments are specifically designed to engage and load palletized materials. *Do not* use forks to handle large loads, such as bales, posts, etc., and avoid carrying loose or shiftable loads, as they can fall or roll back onto operator causing serious injury or death.