

**HIGH DENSITY SEED PLANTER
FOR HIGH DENSITY LEAFY GREEN PRODUCTS**

This high density salad seed mechanical planter allows for planting rows as close as 1 ¼ inches apart. The polilatex sponge horizontal feed rollers are easy to remove for unloading seeds and cleaning before changing seeds. Tandem toolbars with 32 soil openers are adjustable and removable if wider row widths are required. Four crank adjustment with planting depth gauges for precise raising and lowering of soil openers. Front and rear stainless steel rollers insure a smooth level bed top for mechanical harvesting.

One of the many unique features is the positive ground drive. Thus the planter obtains equal seed distribution no matter what the speed of the tractor.

Different planter widths and number of soil openers available upon request.

Specifications Subject To Change Without Notice

SEEDING DISTRIBUTORS



Seed distributors with sponge horizontal rollers available with 4, 6, or 8 outlets.

DISTRIBUTOR DISASSEMBLY



User-friendly disassembly system for unloading seeds and cleaning before changing seeds.

DISASSEMBLY OF THE ROLLERS



Easy disassembly of seed roller when changing rollers.


CHANGING SPEEDS



Chain and sprocket speed changes that allow for up to 80 different ratios when required.

HIGH DENSITY PLANTER FEATURES

SIDE DRIVE

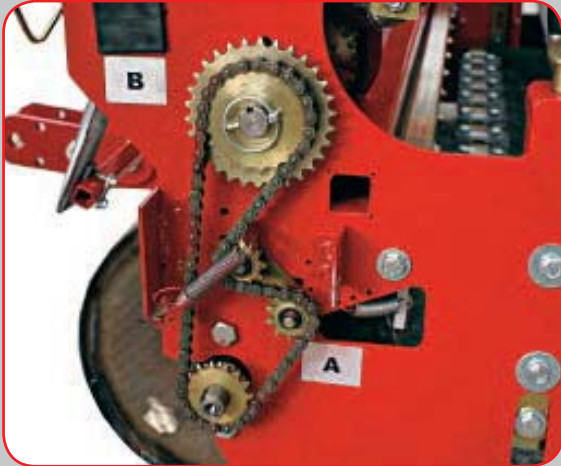

Side drive system with 2 speed changes powered by the front roller.

SEED SHOES



Stainless steel soil openers are mounted on tandem toolbars, which allow for planting rows to a minimum of 1 ¼ inch spacing. Seed openers oscillate in case of obstructions.

DEPTH ADJUSTMENT SYSTEM



Four crank adjustment with planting depth gauges for precise raising and lowering of the soil openers.

REAR ROLLER ASSEMBLY



Stainless steel 12.8 inch diameter by 70 inch long with scraper. Full length mesh steel inspection platform.

FEATURES:

- Cat. 2, 3-point hitch
- Heavy double toolbar frame
- Built for bed tops of 66 inches
- 4 - Seed distributors with polilatex sponge horizontal rollers with 8 outlets
- 4 Seed hoppers - 12.7 quart capacity each
- Polilatex sponge feed rollers
- 2 Stainless steel 12.8" x 70" front and rear rollers
- The hydraulic drive motor with proportional valve powers the front and rear stainless steel roller to insure a smooth level bed for the seed openers
- 32 - Stainless steel soil openers with minimum spacing of 1 ¼ inches
- 4 Crank adjustment with depth gauges for exact raising and lowering of the soil openers
- Chain and sprocket speed changes that allow for up to 80 different ratios for changing quantity of seed
- Full length mesh steel inspection platform
- Also available for different widths and number of seed openers

Your Gearmore Dealer

HYDRAULIC FRONT ROLLER DRIVE



The hydraulic motor drive powers the front stainless steel roller to insure a smooth level bed for the seed openers.

CHAIN / SPROCKET REAR ROLLER DRIVE



Chain drive to rear roller to insure firm level bed top for mechanical harvesting. Hydraulic drive.

SPECIFICATIONS:

MODEL NO.	DESCRIPTION	WIDTH	DEPTH	WEIGHT
AI-620-SNT-32	Salad Seed Planter - 32 Lines, 2" spacing	6' - 2"	6'	1200#