

GEARMORE INC.

YOUR FORKLIFT HEADQUARTERS

CLAMP-ON BUCKET FORKS ■ TRASH FORKS ■ PALLET FORKS
QUICK-ATTACH BUCKET FORKS ■ 3-POINT FORKS



"TURNS TRACTORS INTO LOW COST FORKLIFTS"

14 Different models - 32 sizes in capacities from 1,000 to 22,000 pounds

13477 Benson Ave. - Chino, CA 91710 - Ph: 909/548-4848 - Fax: 909/548-4747

PALLET FORKS

BRACKETS FOR LOADER PIN-ON & JD QUICK ATTACH

ULF/JLF Series are handy fork attachments that turn your tractor/loader into a low cost forklift. The forks feature lockable tines and slotted rails. The solid tines are made of Boron Steel and then are heat treated. Two mounting styles are available; direct pin-on and JD quick attach. These fork attachments fit compact and utility loaders.



WARNING: The loader mounted fork attachments are specifically designed to engage and load palletized material. **Do not** use forks to handle large loads, such as bales, posts, etc. and avoid carrying loose or shiftable loads, as they fall or roll back onto operator causing serious injury or death.



SPECIFICATIONS

MODEL/CODE	ULF-2242	JLF-2242	ULF-3542	ULF-3548
Lift Capacity:	2250 lbs.	2250 lbs.	3750 lbs.	3750 lbs.
Fork Length:	42"	42"	42"	48"
Tine Size:	1 ¼" x 3" Solid	1 ¼" x 3" Solid	1 ⅜" x 4" Solid	1 ⅜" x 4½" Solid
Loader Mounts:	Fits many compact loaders that measure between 28 ¼" ID & 47 ¼" OD with ¾" or 1" pins	Fits John Deere compact loaders with quick-change attachment carrier	Fits many loader frames between 32" ID & 48" OD with 1" or 1 ⅜" pins	Fits many loader frames between 32" ID & 48" OD with 1" or 1 ⅜" pins
Weight:	280 lbs.	280 lbs.	370 lbs.	385 lbs.

AVAILABLE FOR UNIVERSAL, JOHN DEERE, & GLOBAL/EURO QUICK ATTACH

Skid Steer Series have a new heavy duty frame which is designed to handle both the 3750 and 5500 lb. capacity forks. The 10 gauge brickguard offers outstanding strength and smooth surface for protection and less load damage. Also, the convenient non-skid step offers easy operator access, except 2300 lb. capacity. The tine end visibility is excellent. These forks are available in 2300, 3750 & 5500 lb. capacities. Fork tines are available in 42" and 48" length. The forks also feature solid tine positioning with spring loaded toggle operation and easy loading with tapered tines.



SPECIFICATIONS

MODEL/CODE	DESCRIPTION	CAPACITY	TINE LENGTH	WEIGHT
108308	Q.A. Pallet Fork Assembly	2300 lbs.	42"	250#
108309	Q.A. Pallet Fork Assembly	2300 lbs.	48"	265#
17380 / 102028	Q.A. Pallet Fork Assembly	3750 lbs.	42"	335#
17380 / 102030	Q.A. Pallet Fork Assembly	3750 lbs.	48"	355#
101177 / 102028	J.D. Pallet Fork Assembly	3750 lbs.	42"	410#
101177 / 102030	J.D. Pallet Fork Assembly	3750 lbs.	48"	440#
17380 / 102032	Q.A. Pallet Fork Assembly	5500 lbs.	42"	375#
17380 / 102034	Q.A. Pallet Fork Assembly	5500 lbs.	48"	395#

Specifications Subject To Change Without Notice


BUCKET & 3-POINT FORKS

QUICK-ATTACH BUCKET FORKS

UNIV Series These bucket forks provide increased production and versatility on front end loaders. Turns your loader into a forklift in seconds. Special safety lock brackets are welded to the bucket to insure that the tines are locked in place. Tines are made of special boron steel and fully heat treated after bending, *except the 12 UNIV*. Rods are made of 4140 ground polished high carbon steel.



Safety Lock System

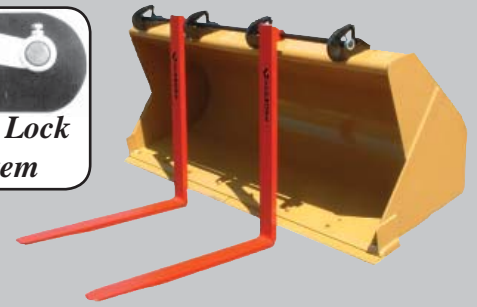

SPECIFICATIONS

MODEL NO:	12 UNIV	25 UNIV	40 UNIV	60 LB	60 UNIV	80 UNIV	110 UNIV*
Max. Load Capacity at Tine Center:	1200 lbs.	2500 lbs.	4000 lbs.	6000 lbs.	6000 lbs.	8000 lbs.	11000 lbs.
Fits Bucket Opening up to:	23"	32"	40"	40"	49"	54"	67"
Tine Height**:	31"	38"	46"	46"	55"	61"	73"
Tine Length:	36"	36"	42"	46"	46"	48"	60"
Adjusting Width:	60"	60"	72"	72"	72"	72"	84"
Weight:	185#	240#	330#	400#	435#	690#	960#
Rod Size:	1 ¼" x 5'	1 ¼" x 5'	1 ¼" x 6'	1 ½" x 6'	1 ½" x 6'	1 ¾" x 6'	2" x 7'
Tine Size:	1" x 4"	1 ⅜" x 4"	1 ⅜" x 4"	1 ¾" x 4"	1 ¾" x 4"	2" x 5"	2" x 6"
No. of Brackets:	3	3	4	4	4	4	4

* By adding a third tine, a 16,500# capacity unit is available and by adding a fourth tine, a 22,000# capacity unit is available.
 **Deduct 2" to calculate center of rod bushing height.

3-POINT FORKS

3-Point Series Are ideal for picking up and moving pallets and bins. Models 1200, 1500, and 2000 are equipped with Cat. 1, 3-pt. hitches and 41" length non-adjustable tines and available in 1200 lb., 1500 lb., and 2000 lb. capacities. Model 1500AT forks are equipped with 41" length adjustable tines and available in 1500 lb. capacities.



SPECIFICATIONS

MODEL NO.	CAPACITY	FORK WIDTH	FORK THICKNESS	FORK LENGTH	WEIGHT
1200	1200 lbs.	26" (center to center)	2" x 4" x ⅜" tubing	41"	90#
1500 Q.H.	1500 lbs.	26" (center to center)	1" x 4" solid	41"	160#
2000-3PT Q.H.	2000 lbs.	26" (center to center)	1 ¼" x 4" solid	41"	180#
1500AT	1500 lbs.	4" to 26" (center to center)	1 ¼" x 4" solid	41"	290#
3548 Cat. 2	3500 lbs.	10" to 36"	1 ¾" x 4" solid	48"	315#

Specifications Subject To Change Without Notice

CLAMP-ON FORKS

CLAMP-ON BUCKET FORKS

Clamp-On Series Mount easily in seconds to most loader buckets without using tools. Available in 1000, 2000, 3000, 4000, and 6000 lb. capacities. Slidable handle allows forks to be mounted in most positions on the bucket, such as next to the side or back of the bucket. Forks are equipped with handles for ease in mounting and handling. Models ending in "W" are designed for compact loader buckets with bolt-on cutting edges.



SPECIFICATIONS

MODEL NO:	1000	1000W	2000	2000WB	3000	4000	6000
Lift Capacity:	1000 lbs.	1000 lbs.	2000 lbs.	2000 lbs.	3000 lbs.	4000 lbs.	6000 lbs.
Useable Tine Length:	32"	32"	36"	36"	42"	42"	49"
Max. Bucket Lip Thickness:	3/4"	1 1/16"	3/4"	1 1/16"	1 1/4"	1 3/4"	2 1/4"
Tine Size:	2" x 3"	2" x 3"	2" x 3"	2" x 3"	2" x 4"	2" x 4"	3" x 5"
Weight:	90 lbs.	90 lbs.	110 lbs.	110 lbs.	150 lbs.	170 lbs.	275 lbs.

CLAMP-ON TRASH FORKS

GTF Series Clamp-on trash forks are a handy tool that will make moving tree branches and other debris an easy task. An investment in these new quick on and off Clamp-On Trash Forks will increase your front end loader's versatility. Equipped with two heavy screw-lock clamp brackets with handles. Tines are 2" square, 1/4" wall tubing by 20" length. Clamps fit deep into the bucket for added strength.



SPECIFICATIONS

MODEL NO:	GTF48	GTF54	GTF60	GTF66	GTF72
Bucket Size:	48"	54"	60"	66"	72"
Width:	46"	52"	58"	64"	70"
Tines:	5	5	6	6	7
Approx. Spacing Between Tines:	8 1/2"	10"	8 1/2"	10"	9"
Weight:	160 lbs.	170 lbs.	180 lbs.	195 lbs.	210 lbs.

Specifications Subject To Change Without Notice