



GROUND SHARK™ STANDARD DUTY BRUSH CUTTER



Bradco's best selling Ground Shark™ Brush Cutter is now available in a standard duty class. The Ground Shark™ family of brush cutters have been engineered to handle your toughest vegetation management jobs. Ground Shark™ brush cutters are compatible with all major OEM branded Skid Steer Loaders. They are available in standard and extreme duty classes, standard and high flow, and a variety of cutting widths from 60" to 78". The standard duty unit cuts light to medium density brush and trees up to 4" in diameter. The entirely new drive train runs smooth and quiet while moving easily to clear the toughest material. Dual pressure reliefs on the hydraulic motor protect against pressure spikes that could damage the drive system. The 1/4" steel "clean deck" design with high quality powder coat helps keep the deck clear of debris and is easier to clean and maintain. Bi-directional blades allow the operator to cut in both directions extending operational life and reducing maintenance costs. If the situation requires, the cutting blades will stop rotating within seconds once the motor is disengaged minimizing the potential for damage to the machine and drive train.

Optional dual wheel kits are available that mount to the underside of the front deck to keep the blades off the ground and prevent scalping. These brush cutters are ideal for roadside maintenance, right of way clearing, site preparation, fire control, fence line maintenance, and trail maintenance.


Distributed by:
GEARMORE, INC.

FEATURES:


- Compatible with all major OEM branded skid steer loaders
- Clears light to moderate density brush and hardwoods up to 4" in diameter
- Available in standard and high flow with cutting widths from 60" to 78"
- Replaceable skid shoes extends deck life
- Steel deck is 1/4" thick
- Redesigned drive train to improve performance, efficiency, and reliability
- Three bi-directional blades in lieu of two allow the operator to cut in both directions extending operational life and reducing maintenance costs
- Dual pressure reliefs on the hydraulic motor protect against pressure spikes that could damage the drive system
- Optional dual wheel kits are available that mount to the underside of the front deck to keep the blades off the ground and prevent scalping
- Optional pressure gauge indicator easily visible to the operator helps prevent excessive stalling and overheating



Optional Pressure Gauge Indicator

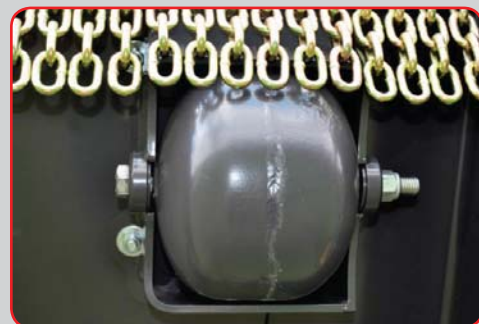

Optional Dual Wheel Kit

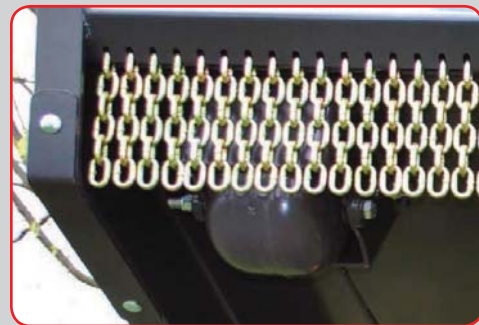

Replaceable Skid Shoes

Your Bradco/ Gearmore Dealer



Order No:	30360A	30372A	30378A	30372B	30378B	30372C	30378C
Recommended Hyd. Flow (GPM):	15 - 25	15 - 25	15 - 25	26 - 32	26 - 32	32 - 40	32 - 40
Height:	24"	24"	24"	24"	24"	27"	27"
Length:	76"	88"	94"	88"	94"	88"	94"
Width:	64"	76"	82"	76"	82"	76"	82"
Deck Height:	9"	9"	9"	9"	9"	9"	9"
Cutting Width:	60"	72"	78"	72"	78"	72"	78"
Cutting Capacity:	4"	4"	4"	4"	4"	4"	4"
Deck Thickness (Steel):	.25"	.25"	.25"	.25"	.25"	.25"	.25"
Req'd Skid Steer Lift Capacity:	1200 lbs.	1400 lbs.	1500 lbs.	1400 lbs.	1500 lbs.	1500 lbs.	1600 lbs.
Approximate Weight:	1120#	1280#	1365#	1280#	1365#	1320#	1405#