



COLLARD®

HEDGER/TOPPER

FRONT TRACTOR MOUNTED


FEATURES

- Dual 15cc hydraulic motors for added power
- Heavy duty truss frame
- Single telescopic arm
- Electro hydraulic controls
- Standard cutter bar length 6.8 feet
- Tractor requirement of only 11 G.P.M. at 2140 PSI
- Vertical reach of 20 feet
- Flat topping height of 13 feet
- Alloy section element has a **10 year guarantee**
- Hedger comes with all hoses, fittings and JIC couplers
- 19.6" Diameter saw blade are standard equipment - flail knives are optional



Model TA400

Two Types of Cutting Heads Available

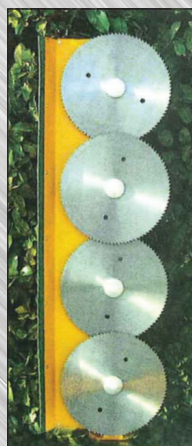

Standard
Saw Head



Hedger in
Transport Position



Optional
Knife Head

The **COLLARD Hedger/Topper** was designed to hedge, top trees and bush crops. The vertical reach for hedging is 20 feet and flat topping of 13 feet. The machine is front tractor mounted. Easy to operate with electric controls. The cutting bar length is 6.8 feet and additional blades can be added for longer cuts. Also, the new larger capacity 15cc hydraulic motors increase the power by 20% for faster, clean cuts. This unit is great for orchard hedging, topping and fence line maintenance.

Marketed by:

GEARMORE INC.

13477 Benson Ave. • Chino, CA 91710

Ph: 909/548-4848 • Fax: 909/548-4747

www.gearmore.com • sales@gearmore.com



COLLARD®

HEDGER/TOPPER

COLLARD EXTREME DUTY CUTTING ELEMENTS WERE DESIGNED TO NOT FLEX OR BEND

TRANSMISSION PROTECTED

The transmission case is totally protected from the foliage vegetation

DEFLECTOR MONOBLOCK

The deflector possesses a monoblock crankcase deflector. Fixed in the profile, it is perfectly stiff.

SCULPTURED FOR THE CUTTING

The body profile aerodynamicism was study to facilitate the vegetation penetration. This profile also facilitates the cut branches evacuation, and great flow.

AN EVEN MORE POWERFUL TRANSMISSION

Belts stemming from an aeronautical technique are tightened in factory. The power of the transmission is increased by more than 10%.

SHOCKS ABSORPTION

The profile edge attack is in synthetic material, it absorbs the possible shocks, masks flow of connections between modules and facilitates the cut branches evacuation.

OPTION:

~ PTO driven hydraulic pump kit

CUTTING QUALITY

This material is well polished to the new sharp edge polychromed knife edge which greatly decreases clogging. The COLLARD polychromed knives improve the cutting quality.

BODY IS STAINLESS ANODIZED LIGHT ALLOY MINILEM PROFILE

The alloy body is as strong as many steels and is rigid against twisting and flexing.



Saw blades are best for small and large branches. Flail knives are best for green material.

SPECIFICATIONS:

Model No.	Description	Reach	Topping	Weight
TA400	Hedger/Topper - 5 Blades	20 Ft.	13 Ft.	860#

Your **COLLARD®** Dealer

Specifications Subject To Change Without Notice

13477 Benson Ave. • Chino, CA 91710 • Ph: 909/548-4848 • Fax: 909/548-4747