



# VENTURI AIR ORCHARD SPRAYERS

**FEATURING 12 VENTURI CANNON HEADS FOR TALL TREES**

*"10 Year Warranty  
on Polyethylene  
Trailer Tanks"*

*Our 12 nozzle cannon  
head will spray up to  
50 foot trees*



*The cannon Venturi Air  
Sprayer operating in 45 foot  
high walnut orchard at 50  
gallons per acre.*

To insure total coverage in dense, tall trees; our Cannon Sprayers are the answer. The spray will reach up to 50 feet. Extensions are available for the upper cannons if required.

These unique Venturi Air Sprayers feature our most powerful high speed turbine fans and are the latest technology in fine micron droplets spraying. Thus, growers achieve the following benefits: spray atomization of droplets are smaller and more uniform, less fill-ups, even distribution of concentrated spray, complete foliage coverage, better product utilization, less chemical waste and soil/water contamination.



13477 Benson Ave. • Chino, CA 91710

Ph: 909/548-4848 • Fax: 909/548-4747

[www.gearmore.com](http://www.gearmore.com) • [sales@gearmore.com](mailto:sales@gearmore.com)



# TRAILER MOUNTED VENTURI AIR SPRAYERS

## FEATURES:

- Molded polyethylene 400 and 500 gallon tanks
- Translucent heavy walled tanks with hinged lid, strainer basket and shower head
- High performance precision balanced all steel, front mounted turbine fan
- Dual centrifugal pumps - 37 G.P.M. for spraying and 37 G.P.M. for agitation
- Low pressure spraying system - 15 to 40 PSI spraying pressure means less maintenance on pumps and nozzles
- Wheels are adjustable up or down, front or rear, or in and out to obtain the best balance and clearance
- Electro valve system controls spray off or on, both sides spray, and right or left only
- No gearbox for fan speed-up, unique simple power band system with built-in overrunning clutch
- Separate safety clean water 8 gallon tank for hand washing
- Dolly wheel adjustable parking stand



*Low pressure centrifugal pump made of anti-corrosive materials requires little maintenance*




*Power band fan speed up system with built-in overrunning clutch*



*Rotating yellow calibration discs, adjusts easily to provide accurate and constant regulation of application*




*Shower head is built into the main strainer basket to easily put wettable powders into suspension*

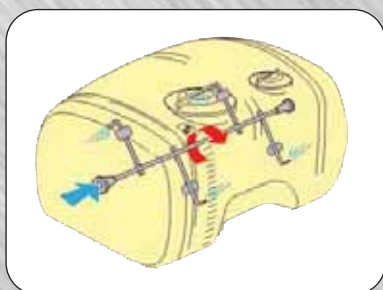

*Centrifugal pump powers rotating liquid agitation system to insure product mix*



*Electro valve controls to operate on, off, left, and right spraying*

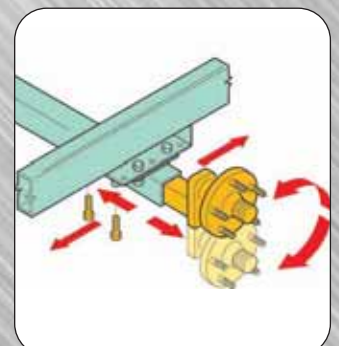

*Wheels adjust up or down, in or out, front or rear to obtain best balance and clearance*

## SPECIFICATIONS:

Model No.	Gallons	Volume of Air	Min. Width	Length	Tire Size	H.P. Required	WT.
T55E2-1500	400 Gal.	9123 C.F.M.	66"	14'	11Lx15-8 Ply	70 H.P.	1240#
T55E2-2000	500 Gal.	9123 C.F.M.	71"	14'	12.5Lx15-10 Ply	74 H.P.	1320#

*Specifications Subject To Change Without Notice*

13477 Benson Ave. • Chino, CA 91710 • Ph: 909/548-4848 • Fax: 909/548-4747

Form # CI0712-20 Orchard Sprayers