



TWIN SPINNER SPREADER

HIGH CAPACITY - EXTREMELY ACCURATE



Our 2300 pound, 35 cubic foot capacity spreader features twin stainless steel spinner discs which are extremely accurate with only 6.7% variance across the spread pattern. The spreader has dual levers to set the pounds per acre and hydraulic cylinder for off and on. The lever allows for easily setting the spreader for 180°, 90° right or 90° left hand spread. An important option is the two row band spread attachment for spreading material down row lines.



*Shown With Optional
2 Row Band Attachment*

GEARMORE INC.

13477 Benson Ave. • Chino, CA 91710
Ph: 909/548-4848 • Fax: 909/548-4747

www.gearmore.com • sales@gearmore.com



TWIN SPINNER SPREADER

FEATURES:

- Cat. 2 clevis hitch and Cat. 1 pins
- 2300 Pound, 35 cubic foot capacity hoppers
- Dual stainless steel disc with 3 vanes each
- Dual levers with gauge for adjusting the shutter openings
- Can be set at 180°, 90° right or 90° left hand spreading patterns
- Hydraulic cylinder with hose to turn shutters off and on
- Maximum spreading width of 58 feet
- Hopper and frame have special phosphated undercoating and then powder coated and baked at 300 degrees
- Sturdy stamped and ribbed steel frame
- Hopper has a heavy screen to stop large fertilizer clods
- Front mounted stainless steel spread guard
- For tractors with P.T.O. speed of 540 RPM


OPTION:

- ~ Two row band spread attachment

Your Gearmore Dealer



Twin Spinners and Gearboxes

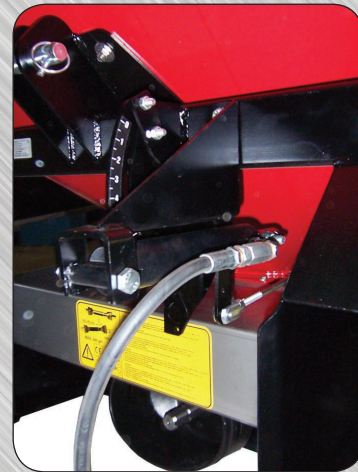

Hydraulic Cylinder For Off & On



Screen To Stop Large Fertilizer Clods

SPECIFICATIONS

MODEL NO.	CAPACITY		MAXIMUM SPREAD WIDTH	HT.	WIDTH	DEPTH	WT.
	LBS.	CU. FT.					
RE-1000	2200#	35 cu.ft.	58 Feet	45"	59"	53"	450#

Specifications Subject To Change Without Notice

13477 Benson Ave. • Chino, CA 91710 • Ph: 909/548-4848 • Fax: 909/548-4747