



# DRAG SCRAPERS

## GENERAL USE - ALL-PURPOSE MODELS



**MODEL AP10 SHOWN  
WITH OPTIONAL DUAL  
WHEELS & TILT**

### FEATURES:

- For tractors 70 to 120 horsepower
- Working widths of 8, 10, & 12 foot
- $\frac{3}{8}$ " x 24" x 36" Deep side plate
- Clearance of 23" raised and 5" below grade
- Hydraulically operated from the tractor seat
- Moldboard  $\frac{1}{4}$ " plate, 24" high
- Internal braces to side plates and moldboard
- Main cross beam 4" x 4" tubing
- 3" x 8" Double acting cylinder and hoses
- Ribbed implement tires - 9.5L - 15SL
- Bolt-on hitch swivel ball

### OPTIONS:

- ~ Tilt axle w/cylinder & hoses
- ~ Dual wheels
- ~ Bolt-on weight boxes

Our Drag Scrapers are an excellent implement for carrying and spreading all types of material. Landscapers find the scrapers great for general grading and spreading exact depths of top soil. Contractors set the cutting edge to spread different depths of gravel for rebuilding roads and storage yards. Dairy men find the scrapers best for moving you know what. The drag scrapers feature a removable 4" x 4" beam tongue that extends to the rear moldboard and is held in place by a 5" x 5" heavy gusseted tube. This feature gives added strength at the point of the most stress.

Featuring larger tires and fold away tongue jack as standard equipment.

### SPECIFICATIONS:

MODELS	WIDTH	CAPACITY	WEIGHT
AP8	8'	1 $\frac{3}{4}$ cu. yd.	1430#
AP10	10'	2 $\frac{1}{4}$ cu. yd.	1525#
AP12	12'	3 cu. yd.	1895#



13477 Benson Ave. • Chino, CA 91710

Ph: 909/548-4848 • Fax: 909/548-4747


[www.gearmore.com](http://www.gearmore.com) • [sales@gearmore.com](mailto:sales@gearmore.com)






# DRAG SCRAPERS

## HIGH CAPACITY TO MAXIMIZE LOADS

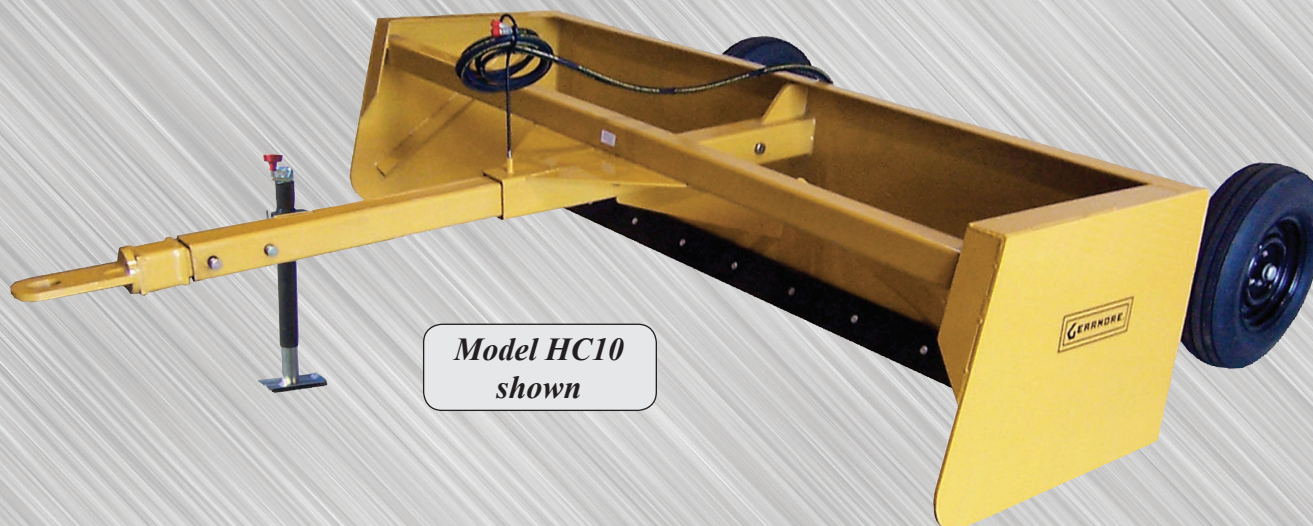

*Model HC10  
shown*

The "HC" High Capacity Series of Drag Scrapers feature heavy, large side plates - ½" thick. These side plates are 30" high by 40" deep, thus allowing for dragging and depositing large amounts of material. Like the "AP" series, the beam tongue extends to the rear moldboard and is held in place by a 5" x 5" heavy gusseted tube. The axle assembly is built with 4" x 2" tubing. The larger dairies and feedlots find these scrapers best for their operations. Now featuring larger tires and fold away tongue jack as standard equipment.

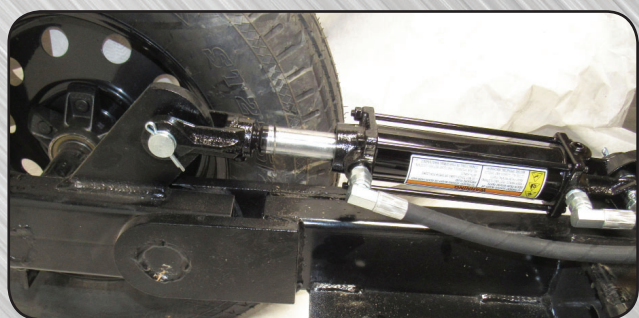

Hydraulic tilt with hoses

### FEATURES:

- For tractors 70 to 120 horsepower
- Working widths of 8, 10, & 12 foot
- ½" x 30" x 40" Deep side plates
- Clearance of 23" raised and 5" below grade
- Hydraulically operated from the tractor seat
- Moldboard ¼" plate, 30" high
- Internal braces to side plates and moldboard
- Main cross beam 4" x 4" tubing
- 3" x 8" Double acting cylinder and hoses
- Ribbed implement tires - G70 x 15"
- Bolt-on swivel slotted hitch

### OPTIONS:

- ~ Tilt axle w/cylinder & hoses
- ~ Dual wheels
- ~ Bolt-on weight box

MODELS	WIDTH	CAPACITY	WEIGHT
HC8	8'	2 ½ cu. yd.	1450#
HC10	10'	3 ¼ cu. yd.	1630#
HC12	12'	3 ¾ cu. yd.	2100#
HC14	14'	4 ¼ cu. yd.	2300#

**NOTE:** Tractor colors are available at no charge

*Specifications Subject To Change Without Notice*

13477 Benson Ave. • Chino, CA 91710 • Ph: 909/548-4848 • Fax: 909/548-4747