

## TURF MAINTENANCE EQUIPMENT FOR GOLF COURSES, PARKS, SCHOOLS AND RECREATION DEPARTMENTS



### To Insure The Health and Appearance of Turf

This brochure focuses on 13 quality implements for the care and maintenance of your turf operation.

#### **AerWay®** ADVANCED AERATION SYSTEMS



This is a fast, effective, low cost method to keep the soil surface open and minimize compaction without disrupting use of the turf area. As surface compaction is a continuous problem, caused by both use (foot traffic) and maintenance (mowing), venting aeration should be scheduled as often as possible to be effective. *AerWay's* complete line of *Turf Aerators* feature 5 different tine rotors to handle your exact requirements. The polyethylene built-in ballast tanks, when filled with water, obtain maximum tine penetration. Some of the popular options are: smoothing rear roller, tine spacings from 3 to 6 inches, and electric/hydraulic power pak for pull type units.

| WIDTH | APPROX. H.P. w/BALLAST | 3-POINT WEIGHT | 3-POINT Wt. w/BALLAST | PULL TYPE WEIGHT | PULL TYPE Wt. w/BALLAST |
|-------|------------------------|----------------|-----------------------|------------------|-------------------------|
| 45"   | 25 - 35                | 977 lbs.       | 1627 lbs.             | 1194 lbs.        | 1844 lbs.               |
| 60"   | 30 - 40                | 1143 lbs.      | 2000 lbs.             | 1437 lbs.        | 2300 lbs.               |
| 75"   | 40 - 50                | 1223 lbs.      | 2263 lbs.             | 1587 lbs.        | 2627 lbs.               |
| 90"   | 50 - 60                | 1398 lbs.      | 2648 lbs.             | 1753 lbs.        | 3000 lbs.               |

## PULL TYPE SPINNER SPREADER



Our Seeder/Spreader is a self contained, towable implement that can be operated by almost any vehicle. This unit has a ground driven, cast iron, oil bath gearbox that can be disengaged when transporting. It is ideal for spreading seed, fertilizer, sand, and salt. The large 20" diameter x 10" wide tires make this a "Turf Friendly" implement. The spreader features a cable control that allows the operator to adjust spread rate and turn the spreader on and off from the vehicle seat. This is a popular, low cost spreader for golf courses, parks, sport fields, and turf farms.

| MODEL No. | CAPACITY |         | SPREAD WIDTH | MACHINE |       |       | WT.  |
|-----------|----------|---------|--------------|---------|-------|-------|------|
|           | LBS.     | CU. FT. |              | HEIGHT  | WIDTH | DEPTH |      |
| PTB560    | 1070     | 14.2    | Max. 52'     | 51"     | 65"   | 96"   | 350# |


## 3-POINT SPRAYERS

The GDL Series is the only sprayer line that features 3 separate polyethylene tanks. A main chemical application tank. A clean water tank - so chemical residue can be flushed through the system to insure proper work order. The third is a hand wash tank for convenience and safety. The sprayers can be ordered with boom, handgun or both.



| MODEL No.     | GDL200   | GDL400   | GDL600   | GDL800   |
|---------------|----------|----------|----------|----------|
| Tank Cap:     | 50 Gal.  | 100 Gal. | 150 Gal. | 200 Gal. |
| Pump GPM/PSI: | 11 / 580 | 14 / 580 | 14 / 580 | 14 / 580 |
| Width:        | 38"      | 48"      | 48"      | 61"      |
| Weight:       | 230#     | 250#     | 290#     | 350#     |

## TRENCHER

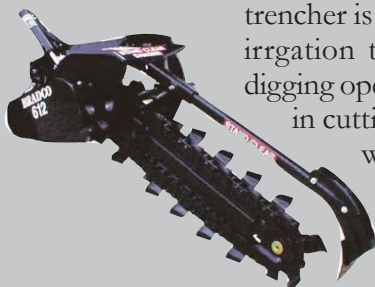

This Model 612, 3-pt. hitch, Cat. I trencher is an excellent tool for digging irrigation trenches and other narrow digging operations. This unit is available in cutting widths of 6", 8", and 10" with digging depths of 30", 36", and 48". The trencher is designed for hydrostatic tractors only.

## FLAIL MOWERS



This Gearmore SLE Series flail mowers were developed for mowing grass and light weeds with side slicing Y blades. All models are also available with finish mowing cupped "ducks-foot" blades for mowing grass. Standard features include ASAE quick attach 3-point hitch, low profile design, center mount or offset, adjustable rear roller and many more. These flail mowers were designed to achieve fine shredding in parks, schools, and golf courses.

| MODEL No. | MOWING WIDTH | OVERALL WIDTH | No. OF KNIVES | MIN. H.P. | WT.  |
|-----------|--------------|---------------|---------------|-----------|------|
| SLE-120   | 48"          | 54"           | 22            | 20        | 415# |
| SLE-160   | 63"          | 69"           | 30            | 28        | 525# |
| SLE-190   | 75"          | 81"           | 36            | 35        | 620# |

## TRAILER SPRAYERS

Our sprayers offer the latest design in an All Purpose Sprayer. The low profile polyethylene tank has a full length stainless steel agitation system and a large hatch with shower head to easily put wettable powder into suspension. An additional water filling hatch is included to keep chemicals from being splashed while filling. The sprayer can be purchased with 14, 20 & 28 foot booms, hose reels, handguns and different length hoses. The applications for these sprayers are endless municipalities, golf courses, schools, etc.



| MODEL No. | TYPE    | WIDTH | LENGTH | HEIGHT | WT.  |
|-----------|---------|-------|--------|--------|------|
| GPE800    | Trailer | 54"   | 102"   | 48"    | 490# |
| GSE800    | Skid    | 35"   | 80"    | 36"    | 360# |

## FINISHING MOWER

We now have available rear discharge mowers featuring totally open rear deck with belt guards that allows the grass to be safely and smoothly discharged giving your turf that rich, manicured look. Some of the other outstanding features are - free floating flex hitch, dual tires front and rear, self-tightening belt, 40 HP gearbox, and heavy duty fully baffled steel deck.



| MODEL No. | CUT. WIDTH | WT.  |
|-----------|------------|------|
| RFM-48    | 48"        | 620# |
| RFM-60    | 60"        | 660# |
| RFM-72    | 72"        | 710# |
| RSFM-72*  | 72"        | 720# |

*\*Special V design belt for rough mowing*

## DUMP TRAILERS

We supply 5 popular models of dump trailers from 1 1/2 to 8 tons capacities. The trailers are available in rear and 3-way dump. All models feature rear hinged tailgates and swivel clevis type hitches. There is no better system for transporting and dumping material.

| MODEL No. | WT. CAP. | CAPACITY    | NO. OF TIRES | WT.   |
|-----------|----------|-------------|--------------|-------|
| 1.5T50X72 | 1.5 Ton  | 35 cu. ft.  | 4            | 600#  |
| 2.5T60X96 | 2.5 Ton  | 77 cu. ft.  | 4            | 1500# |
| 4T63X99   | 4 Ton    | 2.5 cu. yd. | 2            | 1800# |
| 5T63X99   | 5 Ton    | 2.5 cu. yd. | 4            | 1875# |
| 8T60X120  | 8 Ton    | 3.5 cu. yd. | 4            | 2000# |



## TOPDRESSERS

Turf Tiger Cub is user friendly and more versatile than any other equipment of its kind thanks to the exclusive Saber Tooth beater. Turf Tiger Cub spreads all kinds of bulk material such as sand/peat topdressing, infield mixes, compost, grass clippings, synthetic material, lime, and wood chips with precision, power and speed. There is nothing else as affordable for limited budgets at schools, parks and recreation departments, and golf courses.



| MODEL No.        | 3100/3100ED | 3200        |
|------------------|-------------|-------------|
| Heaped Capacity: | 1.8 cu. yd. | 2.3 cu. yd. |
| Overall Width:   | 70"         | 70"         |
| Overall Height:  | 51"         | 51"         |
| Loading Height:  | 43"         | 43"         |
| Min. H.P. Req'd: | 25 H.P.     | 30 H.P.     |
| Weight:          | 1140#       | 1300#       |

*Choice of PTO driven or...3100ED 13 HP Honda Engine driven*

## TOPDRESSERS

The Turf Tiger spreads wet or dry material like no other machine. You have total control of spread pattern and thickness of spread by belt speed, attachment speed, endgate opening, and ground speed. The patent pending Saber Tooth attachment is the most effective for wet and dry material, spreading from 8 to 12 feet.



| MODEL No.            | 4300        |
|----------------------|-------------|
| Heaped Capacity:     | 3.2 cu. yd. |
| Overall Length:      | 12' 8"      |
| H.P. Required:       | 35 H.P.     |
| Weight (with tires): | 2180#       |

## TILLERS

| MODEL No. | TILLING WIDTH | OVERALL WIDTH | No. OF TINES | APPROX. H.P. | WT.   |
|-----------|---------------|---------------|--------------|--------------|-------|
| N130      | 53"           | 58"           | 30           | 40 HP        | 780#  |
| N155      | 63"           | 68"           | 36           | 50 HP        | 895#  |
| N180      | 72"           | 77"           | 42           | 60 HP        | 970#  |
| N205      | 82"           | 87"           | 48           | 70 HP        | 1045# |

These medium duty "N" Series Tillers feature a smooth running, all gear drive system. Powered through a heavy 70 horsepower gearbox to an all gear final drive. The tilling action provides a uniform mixture throughout the cultivated depth. Producing loose textured soil that holds moisture and reduces erosion.



## PENDULUM SPREADERS



Our line of Pendulum Spreaders feature an advanced mechanism with regulating key which allows for quickly setting the spread pattern. Other features are exact rate/spread control, quick change spouts, low filling heights, and easy maintenance. The spreading width with the standard spout is 20 to 46 feet.

*Your Gearmore Dealer*

| MODEL No. | HITCH CATEGORY | CAPACITY  |              | OVERALL WIDTH | WT.  |
|-----------|----------------|-----------|--------------|---------------|------|
|           |                | LBS.      | CU. FT.      |               |      |
| PDC400    | Cat. 1         | 925 lbs.  | 13.6 cu. ft. | 46"           | 225# |
| PDV500    | Cat. 1 & 2     | 1155 lbs. | 17 cu. ft.   | 54"           | 290# |
| PDV600    | Cat. 1 & 2     | 1450 lbs. | 20.5 cu. ft. | 54"           | 315# |
| PDHV800   | Cat. 2         | 2000 lbs. | 32 cu. ft.   | 74"           | 375# |

*Specifications Subject to Change Without Notice*

13477 Benson Ave. - Chino, CA 91710 - Ph: 909/548-4848 - Fax: 909/548-4747