





LIFTABLE CHAIN HARROWS

HANDY 3-POINT LIFT SYSTEM FOR TRANSPORTING


*Liftable - Available in
4x4, 6x6, & 8x6*

**CAT I
A. S. A. E.
QUICK
HITCH
COMPATIBLE**

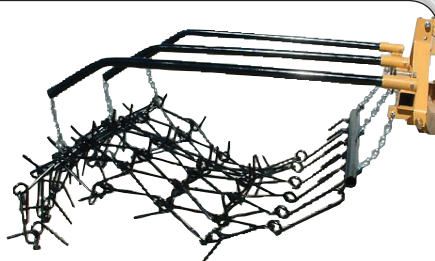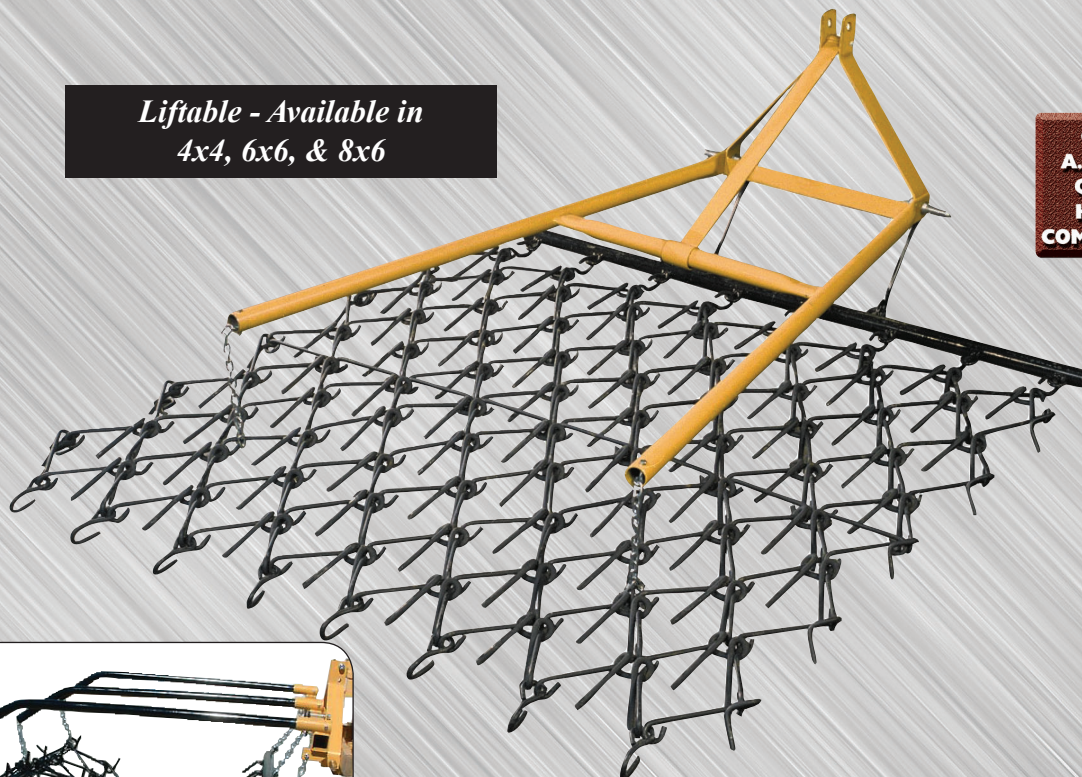

Transport Position

The Gearmore Liftable Chain Harrow is one of the most versatile tools on the market today. The 144 high carbon steel tines on a 6 foot by 6 foot unit flexes to cover every inch of ground as it performs many operations from pasture renovation to seedbed preparation. The 3-point hitch carrier allows you to quickly move from job to job.

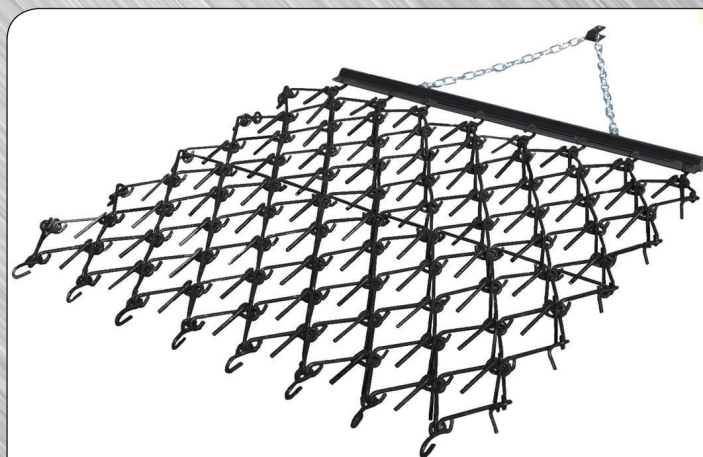

Drag - Available in all sizes

GEARMORE INC.

13477 Benson Ave. • Chino, CA 91710

Ph: 909/548-4848 • Fax: 909/548-4747

www.gearmore.com • sales@gearmore.com



DRAG & LIFTABLE CHAIN HARROWS

VARIABLE ACTION FOR EVERY APPLICATION




AGGRESSIVE ACTION

Tines stand up at 75° angle



LIGHT ACTION

Reversed tines angled farther back



MINIMUM ACTION

Tines up in smoothing position

APPLICATION AND JOBS PERFORMED

PASTURE RENOVATION & MAINTENANCE

Spreads and incorporates manure, thatches dead growth, aerates soil, increases moisture penetration, renovates pastures by preparing soil for seeding while stimulating existing growth. Spreads and incorporates lime and fertilizer. Cover broadcasted seed to help enhance germination.

DIRT & GRAVEL MAINTENANCE

For ball diamonds, race tracks, dirt and gravel roads, rodeo arenas, etc. Smooths rough spots, fills holes and incorporates moisture.

GRASS & TURF MAINTENANCE

For parks, golf courses and playing fields. Incorporates seed and aerates soil. Pulls out dead material without disturbing new growth.

ALL TILLAGE APPLICATIONS

Prepares firm, level seedbed in combination with drills, cultivators and discs. Can be used to break up crusts and clods. Incorporates herbicides evenly because flexible design assures uniform depth.

FEATURES

- Tines ½" diameter x 4 ¼" long
- No parts to lubricate or adjust
- Offset tines eliminate ridges
- Evenly works the ground regardless of terrain
- Cold formed tines eliminate breakage
- Can be operated at speeds of up to 8 MPH

Your Gearmore Dealer

SPECIFICATIONS:

CHAIN SECTIONS				DRAWBARS ONLY		
MODEL NO.	WIDE	DEPTH	WEIGHT	MODEL NO.	WIDTH	WEIGHT
H4X4	4'	4'	70#	D4	4'	16#
H5X4	5'	4'	86#	D5	5'	18#
H6X4	6'	4'	105#	D6	6'	22#
H6X6	6'	6'	157#	D8	8'	27#
H6X8	6'	8'	209#	D10	10'	60#
H8X6	8'	6'	209#	D12	12'	70#
H10X4	10'	4'	174#	D1D	Adaptor kit to connect 2 ea. D8, D10 or D12	

Specifications Subject To Change Without Notice

13477 Benson Ave. • Chino, CA 91710 • Ph: 909/548-4848 • Fax: 909/548-4747

Form # RE0001-19