



# GEARMORE®



**Safety Lock System**

## Quick Attach BUCKET FORKS

The **Gearmore Bucket Forks** allows you to turn your tractor into a forklift in seconds. Our simple safety lock brackets are welded to your bucket. You then curl down the bucket and drive into the forks. Next level the bucket and the forks lock into place.

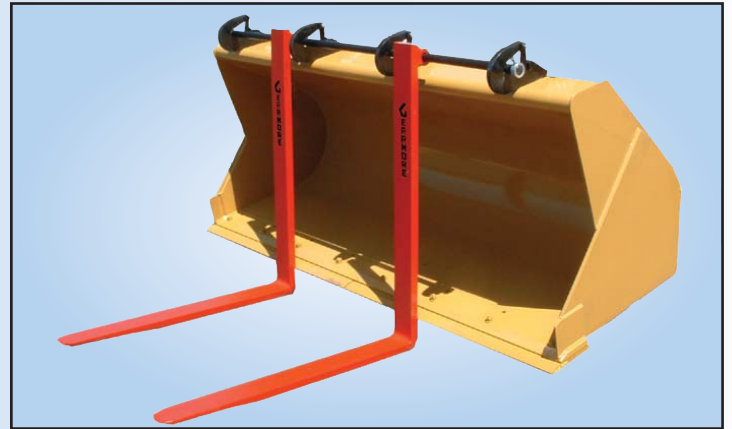

### FEATURES:

- Mounts to your loader bucket in seconds
- Safety lock system to hold forks in place
- Patented forming process increases the bend and heel thickness by 20%
- Tines made of special boron steel and fully heat treated after bending
- No support bracket at bend, which reduces capacity up to 15%
- Heavy plate mounting brackets
- Rods made of 4140 ground and polished, high carbon steel
- Extra long tine taper for easier load entry
- Adjustable tine spacing
- Forks have a safety rating of 3 times the stated capacity (except 1200# forks)
- Capacities from 1,200 to 22,000 pounds

### SPECIFICATIONS:

MODEL NO:	12 UNIV	25 UNIV	40 UNIV	60 LB	60 UNIV	80 UNIV	110 UNIV*
Max. Load Capacity at Tine Center:	1200 lbs.	2500 lbs.	4000 lbs.	6000 lbs.	6000 lbs.	8000 lbs.	11000 lbs.
Fits Bucket Opening up to:	23"	32"	40"	40"	49"	54"	67"
Tine Height**:	31"	38"	46"	46"	55"	61"	73"
Tine Length:	36"	36"	42"	46"	46"	48"	60"
Adjusting Width:	60"	60"	72"	72"	72"	72"	84"
Weight:	185#	240#	330#	400#	435#	690#	960#
Rod Size:	1 1/4" x 5'	1 1/4" x 5'	1 1/4" x 6'	1 1/2" x 6'	1 1/2" x 6'	1 3/4" x 6'	2" x 7'
Tine Size:	1" x 4"	1 3/8" x 4"	1 3/8" x 4"	1 3/4" x 4"	1 3/4" x 4"	2" x 5"	2" x 6"
Number of Brackets:	3	3	4	4	4	4	4

\* By adding a third tine, a 16,500 lb. capacity unit is available and by adding a fourth tine, a 22,000 lb. capacity unit is available.

\*\* Deduct 2" to calculate center of rod bushing height.