

One Pass System For Re-conditioning Arenas



FEATURES:

- ❑ Steel wire mesh 12" diameter rear roller with adjustable feature
- ❑ Units are also available with spiral rod roller plus additional widths of 10 and 12 feet
- ❑ S-tine 1 1/4" x 3/8" x 22" long with reversible and replaceable points
- ❑ Adjustable leveling blade 1/2" x 6" heat treated, beveled, and reversible
- ❑ Modern top mast
- ❑ Cat. 1 hitch on 4', 5', 6', & 7' models
- ❑ Cat. 1 & 2 hitch on 8' unit

The **ARENA-VATOR II** was designed to renovate and condition horse arenas and tracks in a single pass. The units consist of two rows of heavy duty "S" tine shanks that vibrate in a circular motion when contacting the ground. This action loosens and cultivates a large area around the shank points. The adjustable blade then breaks down any clods and levels the soil. The new special steel mesh roller with mud scraper produces a firm, yet giving surface for even, secure footing. The fine small indentions in the soil leaves no "shadows" which could affect horses in their workouts. Units are also available with a new spiral rod roller.


SPECIFICATIONS:

MODEL NO.	DESCRIPTION	WEIGHT
AV2-4	4' with 11 S-Tines	370#
AV2-5	5' with 13 S-Tines	500#
AV2-6	6' with 15 S-Tines	575#
AV2-7	7' with 17 S-Tines	640#
AV2-8	8' with 19 S-Tines	775#

Add "M" to model number for mesh roller units



Designed For Depth Control To Protect Arena Base Material

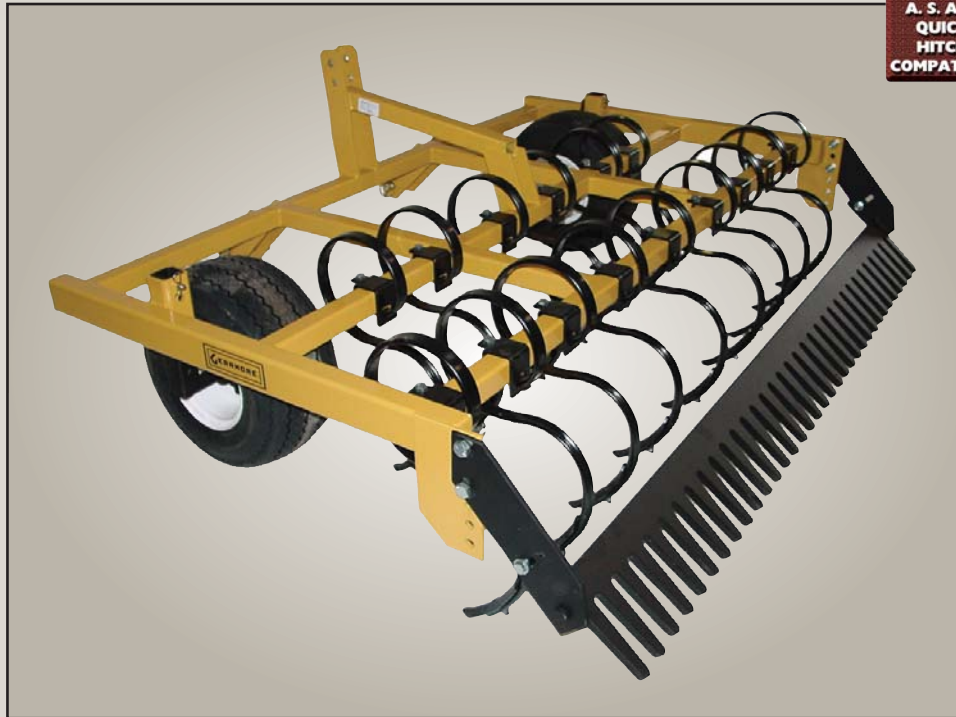

The new **ARENA-COMB** was developed for the highest quality arenas that usually have decomposed granite or ground rubber base under approximately 4 inches of quality sand. If the base material is disturbed the arena will be damaged. Thus, two large 8 inch wide adjustable floatation gauge wheels for depth control are mounted in the front. The two rows of heavy-duty vibrating S-tine shanks loosen and aerate the soil. The special 3/4" thick steel comb levels, gauges the depth on the rear of the machine, and finish combs the sand.

FEATURES:

- ❑ Cat. 1, 3-point hitch
- ❑ Heavy 3 bar frame
- ❑ Two large adjustable 8" wide gauge wheels with 18.5 x 8.5 floatation tires
- ❑ Two rows of 1 1/4" x 3/8" x 22" S-tine vibrating spring shanks
- ❑ Heat treated reversible shank points
- ❑ Special 3/4" thick rear finishing comb

SPECIFICATIONS:

MODEL NO.	DESCRIPTION	WEIGHT
AC-6	6' ARENA-COMB with 15 S-Tines	430#
AC-7	7' ARENA-COMB with 17 S-Tines	530#
AC-8	8' ARENA-COMB with 19 S-Tines	630#