Built By:
BWImplement

Explore more of our products by clicking or scanning here!→

VIEW CATALOG

RIDGERS/RIDGER BLOCKERS

FEATURES

- Cat. II, 3-point A.S.A.E. quick hitch
- 4" x 6" x ¼" wall x 8' long toolbar
- Gangs adjust for tilt and pitch
- Self aligning trunnion 1 ½" bearings
- Available in 3 or 4 blade
- Blades on 9" centers with cast iron spacers
- Parking stand
- Optional mud scrapers


Adjustable gangs



SPECIFICATIONS

Model #	Description	Req'd Horsepower	Weight
BE222-3	3 blade ridger w/22", 24" & 26" blades	60 minimum	1,000 lbs.
BE422-4	4 blade ridger w/22", 24", 26" & 28" blades	60 minimum	1,080 lbs.

Built for heavy duty use

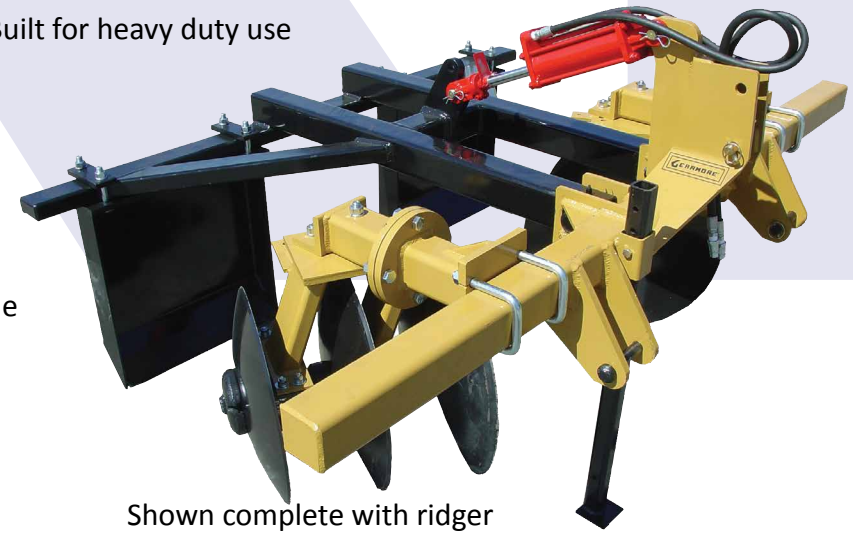

Shown complete with ridger

FEATURES

- Ridger specifications same as above
- Blocker frame - 4" x 6" x ¼" wall
- Toolbars are 8 or 9 feet long
- Blocker width 24" with ⅜" x 4" replaceable plow steel edge
- 3 ½" x 8" depth control hydraulic cylinder with hoses

SPECIFICATIONS

Model #	Description	Req'd Horsepower	Weight
BE222-3B	Complete 3 blade ridger w/blockers	60 minimum	1,200 lbs.
BE422-4B	Complete 4 blade ridger w/blockers	60 minimum	1,280 lbs.

13477 Benson Ave. Chino, CA 91710 | 909/548-4848 | sales@gearmore.com