COLLARD® GEARMORE®

Explore more of our products by clicking or scanning here!→

VIEW CATALOG


HEDGER/TOPPER/SKIRTER


DESIGNED FOR ALL TYPES OF HEDGING REQUIREMENTS

YOUR PERFECT PARTNER FOR FASTER, CLEANER HEDGING EVERY TIME.

These unique Hedgers were designed for half row trimming of orchards and other types of hedging requirements. The heart of this hedger is the unique lightweight aluminum alloy extrusion that provides a rugged rust-proof framework for the cutting blades and has a lifetime guarantee. The units feature two different cutting systems - saw blades or dual swinging knives. The hedgers are supplied with adjustable skirters with separate hydraulic driven motors.

Model P1100-O shown

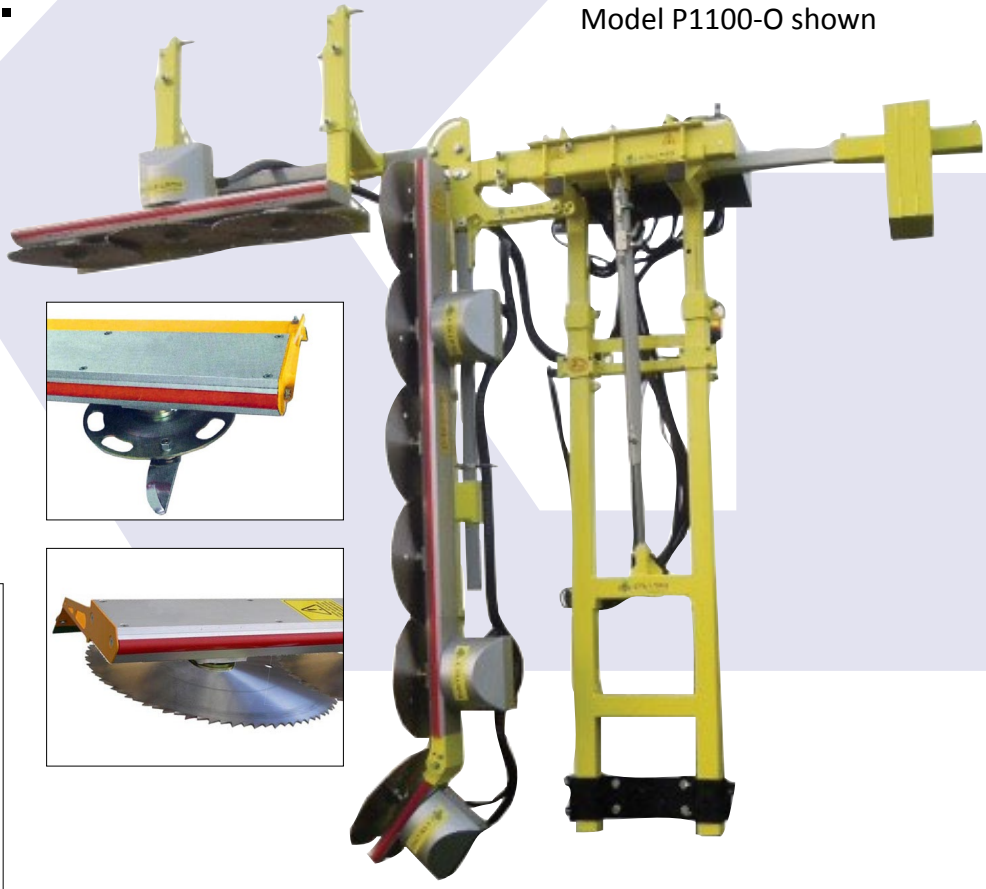

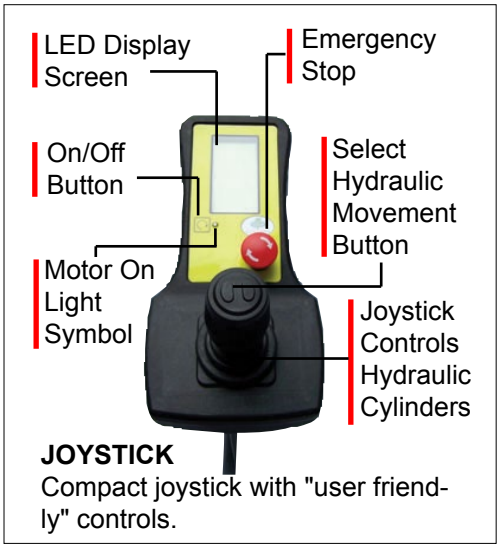


JOYSTICK
Compact joystick with "user friendly" controls.

LEAF REMOVERS

STANDARD FEATURES


- Heavy tubing frame
- "State of the Art" hydraulic motors to insure long life
- Flow limiter for motor controls
- Smooth, thin line blade transmission for easy movement through the foliage
- Rigid deflectors so cut material is thrown away from the operator
- Wide range of adjustments for setting trimmer to grower's exact requirements
- Strong, but lightweight and easy to operate
- Blades turn at 2,500 R.P.M., ensures clean cut ends, which dry and seal neatly to reduce the risk of disease
- Machine runs smooth and quiet, with no vibration
- Equipped with electro-hydraulic joystick controls for precise trimmer adjustments
- Hydraulic cylinders are fitted with load/hold check valves for safety in case a hose fails

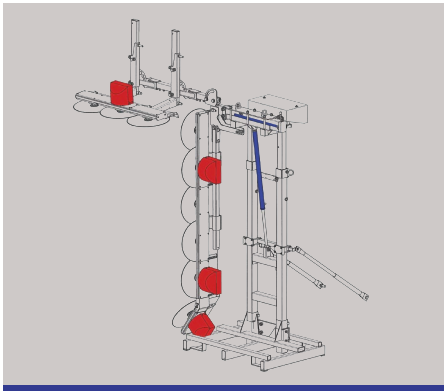

4 - hydraulic motors
2 - hydraulic cylinders

SPECIAL FEATURES

- Hedgers are front mounted
- Available with 18" diameter saw blades or swinging knives
- Main trimmer beam has hydraulic up and down with 32" stroke cylinder
- The upper element manually adjusts 12" vertically
- Vertical and upper cutting element has manual tilt (slope)
- Vertical breakaway system to protect equipment
- Complete hydraulic distributor, hoses, and JIC couplers
- Storage stand for parking the trimmer

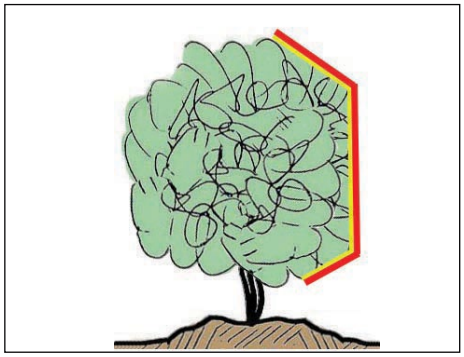

SPECIFICATIONS

Order Code	Model #	Vertical Cut	Horizontal Cut	No. of Blades	Hydraulic Requirements	Weight
0134 1350	P1100-O	90"	48"	9	12 G.P.M. @ 2,600 PSI	1,200 lbs.
Note: The maximum cutting height is approximately 10 foot.						

13477 Benson Ave. Chino, CA 91710 | 909/548-4848 | sales@gearmore.com