
Explore more of our products by clicking or scanning here!→

VIEW CATALOG


VENTURI AIR SPRAYERS

DESIGNED FOR NARROW ROW SPRAYING WITH LOW H.P. TRACTORS

OPTIMIZE YOUR SPRAYING EFFICIENCY.

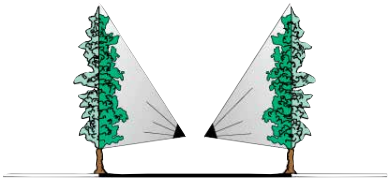

2 half rows

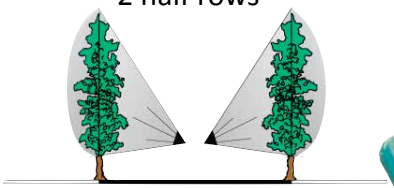

2 complete rows




Our 200 gallon trailer mounted Sprayer was developed for low horsepower tractors doing narrow row spraying. Tractors with PTO horsepower as low as 36 will handle this sprayer. The 48" overall sprayer width allows for operating in the narrowest of rows. Growers achieve the following additional benefits - spray atomization of droplets are smaller more uniform, less fill-ups, even distribution of concentrated spray, complete foliage coverage, better product utilization, less chemical waste and soil/water contamination. Our Venturi Air Sprayers are available with many different distribution spray heads to fit exact profile of your crops. The sprayer with your required spray head is then completely assembled at our warehouse to insure quality.




VENTURI AIR SPRAYERS

FEATURES

- Trailer mounted, PTO 540 R.P.M.
- Translucent heavy walled polyethylene tank with hinged lid, sump, strainer basket and shower head
- Unique polyethylene belly mounted air tubing to the distributor heads
- Dual tank lids for safety, one for water and one for adding chemicals
- Compact, rounded tank design permits traveling through vegetation without damaging it
- Adjustable tread width, facilitates matching sprayer tread with tractor tread
- Tongue with clevis hitch has length adjustment
- Simple, efficient "Dial-A-Rate", 15 position metering disc
- Dual agitation systems, liquid and air
- Low pressure spraying system - 15 to 40 PSI spraying pressure means less maintenance for pumps and nozzles
- Built-in overrunning clutch to protect the tractor and sprayer drive train
- Power band fan speed-up is automatically adjusted by spring loaded idler
- Electro-valve controls to allow operator to switch liquid from off to right, left, or both sides spraying
- Built-in 8 gallon fresh water safety tank

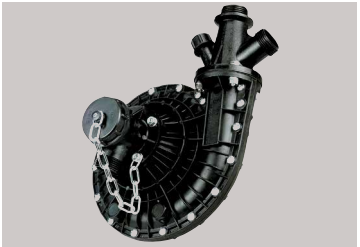


Low pressure centrifugal pump made of anti-corrosive materials requires little maintenance

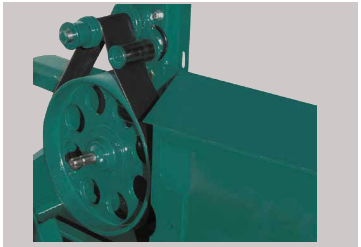

Power band fan speed up system with built-in overrunning clutch



Rotating yellow calibration discs, adjusts easily to provide accurate and constant regulation of application

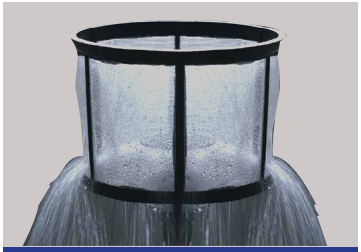

Shower head is built into the main strainer basket to easily put wettable powders into suspension



Electro valve controls to operate on, off, left, and right spraying



Electro cylinders, 2 or 4 with control box operated from the tractor seat

SPECIFICATIONS

Model #	Gallons	Volume of Air	Width	Length	Tire Size	H.P. Required	Weight
T45N1-800	200	3,180 C.F.M.	48"	10' - 5"	9.5Lx15-8 Ply	36	910 lbs.

13477 Benson Ave. Chino, CA 91710 | 909/548-4848 | sales@gearmore.com

FORM #CI0026-25