Explore more of our products by clicking or scanning here!→

VIEW CATALOG

VENTURI AIR SPRAYERS

TRAILER MOUNTED 300 & 500 GALLON CAPACITIES


"10 Year Warranty on Polyethylene Trailer Tanks"

OPTIMIZE YOUR SPRAYING EFFICIENCY.

These unique Venturi Air Sprayers feature our most powerful high speed turbine fans and are the latest technology in fine micron droplets spraying. Thus, growers achieve the following benefits: spray atomization of droplets are smaller and more uniform, less fill-ups, even distribution of concentrated spray, complete foliage coverage, better product utilization, less chemical waste and soil/water contamination. Our Venturi Air Sprayers are available with many different spray heads to fit exact profile of your crops. All sprayers with your required spray heads are then completely assembled at our warehouse to insure quality.



500 Gallon Shown

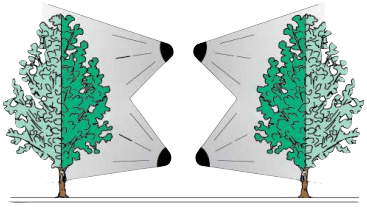

Sprayer operating with 2 lower and 2 upper orchard distribution heads to insure coverage on the upper half of trees







VENTURI AIR SPRAYERS

FEATURES

- Molded polyethylene 300 and 500 gallon tanks
- Translucent heavy walled tanks with hinged lid, strainer basket and shower head
- High performance precision balanced all steel, front mounted turbine fan
- Dual centrifugal pumps - 37 G.P.M. for spraying and 37 G.P.M. for agitation
- Low pressure spraying system - 15 to 40 PSI spraying pressure means less maintenance on pump and nozzles
- Wheels are adjustable up or down, front or rear, or in and out to obtain the best balance and clearance
- Electro valve system controls spray off or on, both sides spray, and right or left only
- No gearbox for fan speed-up, unique simple power band system with built-in overrunning clutch
- Separate safety clean water 8 gallon tank for hand washing
- Dolly wheel adjustable parking stand

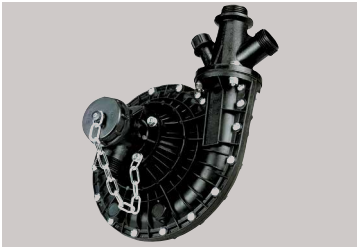


Low pressure centrifugal pump made of anti-corrosive materials require little maintenance

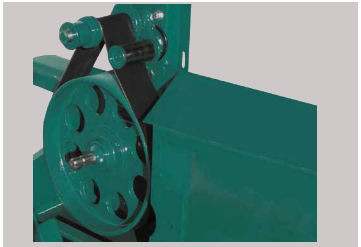

Power band fan speed up system with built-in overrunning clutch




Rotating yellow calibration discs, adjusts easily to provide accurate and constant regulation of application

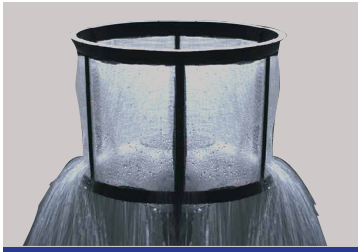

Shower head is built into the main strainer basket to easily put wettable powders into suspension



Electro valve controls to operate on, off, left, and right spraying

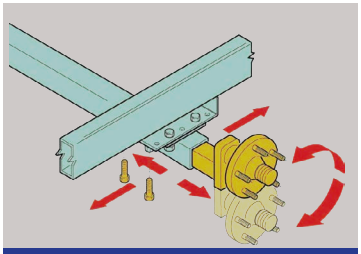

Wheels adjust up or down, in or out, front or rear to obtain best balance and clearance

SPECIFICATIONS

Model #	Gallons	Volume of Air	Min. Width	Length	Tire Size	H.P. Required	Weight
T55S2-1200	300	8,240 C.F.M.	55"	12'	11Lx15-8 Ply	60	1,020 lbs.
T55E2-1200	300	9,123 C.F.M.	57"	12'	11Lx15-8 Ply	74	1,020 lbs.
T55E2-2000	500	9,123 C.F.M.	71"	14'	12.5Lx15-10 Ply	74	1,320 lbs.

13477 Benson Ave. Chino, CA 91710 | 909/548-4848 | sales@gearmore.com