




Explore more of our products by clicking or scanning here!→



# VENTURI AIR ORCHARD SPRAYERS

FEATURING 12 VENTURI CANNON HEADS FOR ALL TALL TREES


## THE ULTIMATE SOLUTION FOR TOTAL COVERAGE IN DENSE, TALL TREES.

To insure total coverage in dense, tall trees; our Cannon Sprayers are the answer. The spray will reach up to 50 feet. Extensions are available for the upper cannons if required. These unique Venturi Air Sprayers feature our most powerful high speed turbine fans and are the latest technology in fine micron droplets spraying. Thus, growers achieve the following benefits: spray atomization of droplets are smaller and more uniform, less fill-ups, even distribution of concentrated spray, complete foliage coverage, better product utilization, less chemical waste and soil/water contamination.

"10 year warranty on polyethylene trailer tanks"



The Cannon Venturi Air Sprayer operating in 45 foot high walnut orchard at 50 gallons per acre

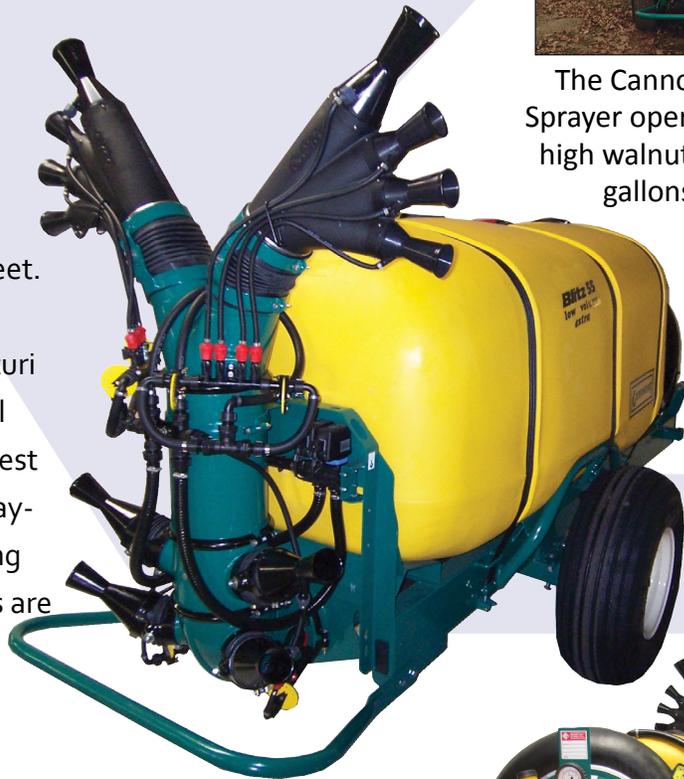


Our 12 nozzle cannon head will spray up to 50 foot trees



# VENTURI AIR ORCHARD SPRAYERS

## FEATURES


- Molded polyethylene 400 and 500 gallon tanks
- Translucent heavy walled tanks with hinged lid, strainer basket and shower head
- High performance precision balanced all steel, front mounted turbine fan
- Dual centrifugal pumps - 37 G..P.M. for spraying and 37 G.P.M. for agitation
- Low pressure spraying system - 15 to 40 PSI spraying pressure means less maintenance on pumps and nozzles
- Wheels are adjustable up or down, front or rear or in and out to obtain the best balance and clearance
- Electro valve systems controls spray off or on, both sides spray , and right or left only
- No gearbox for fan speed-up, unique simple power band system with built-in overrunning clutch
- Separate safety clean water 8 gallon tank for hand washing
- Dolly wheel adjustable parking stand

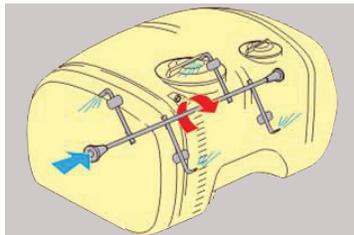

Centrifugal pump powers rotating liquid agitation system to insure product mix



Low pressure centrifugal pump made of anti-corrosive materials requires little maintenance

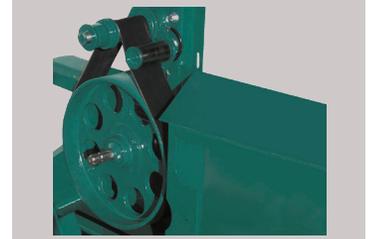

Power band fan speed up system with built-in overrunning clutch




Rotating yellow calibration discs, adjusts easily to provide accurate and constant regulation of application



Shower head is built into the main strainer basket to easily put wearable powders into suspension



Electro valve controls to operate on, off, left, and right spraying

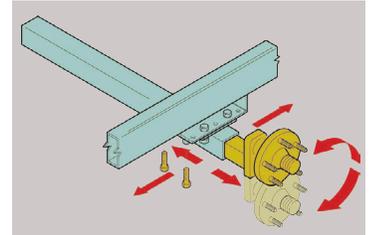

Wheels adjust up or down, in or out, front or rear to obtain best balance and clearance

## SPECIFICATIONS

| Model #    | Gallons | Volume of Air | Min. Width | Length | Tire Size       | H.P. Required | Weight     |
|------------|---------|---------------|------------|--------|-----------------|---------------|------------|
| T55E2-1500 | 400     | 9,123 C.F.M.  | 66"        | 14'    | 11LX15-8 Ply    | 70            | 1,240 lbs. |
| T55E2-2000 | 500     | 9,123 C.F.M.  | 71"        | 14'    | 12.5LX15-10 Ply | 74            | 1,320 lbs. |