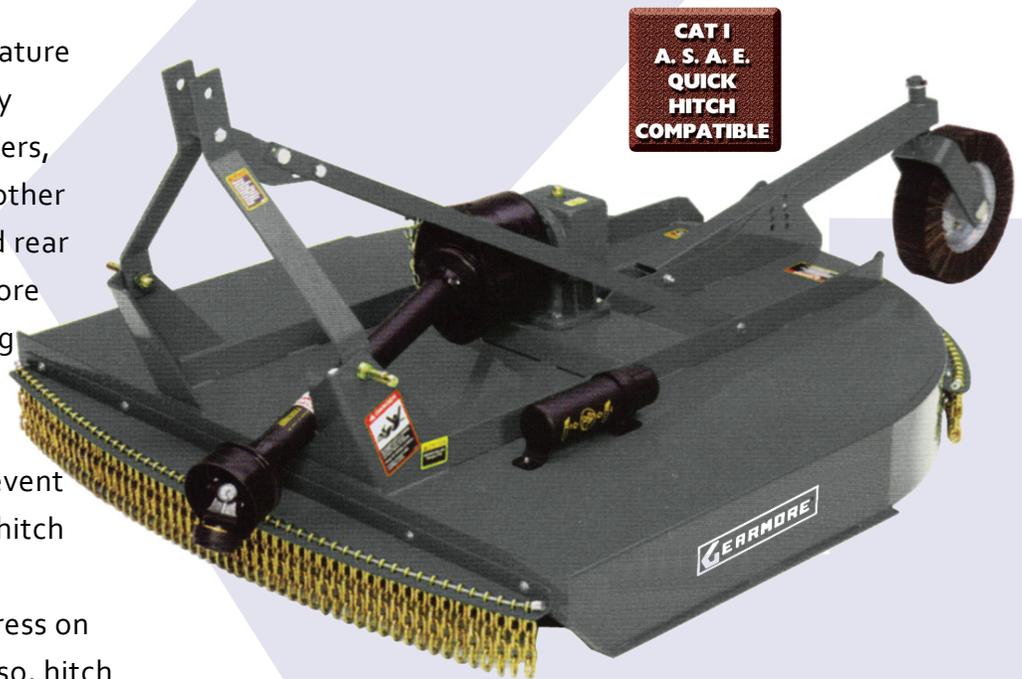# ROTARY MOWERS

"200" SERIES

MOW SMARTER, NOT HARDER.

Our 200 Series Mowers feature round back design for easy maneuvering in tight corners, around trees, fences and other obstructions. The rounded rear opening also allows for more even distribution of exiting material. All seams on the decks are fully welded for added strength and to prevent rust. The flexible floating hitch follows the contour of the terrain without putting stress on the mower and tractor. Also, hitch is designed to A.S.A.E. quick hitch standard for easy hook-up to tractor with a quick hitch system. The special baked on, powder coated, corrosion resistant paint insures excellent appearance for years.

CAT I
A. S. A. E.
QUICK
HITCH
COMPATIBLE

60" mower w/standard safety chains shown

ROTARY MOWERS

FEATURES

- Cuts up to 1" diameter material
- Flexible floating hitch follows the contour of the terrain, thus reducing stress on tractor and mower
- Two 2" x 2" full length angles for main deck support
- Heavy spindle pan guard
- Reinforced gearbox mounting plate
- Integral PTO shaft storage bracket to keep from getting contaminated
- Shielded series 4 PTO shaft
- Grade 5 plated hardware
- Powder coated paint
- Safety chain front and rear
- Unique mower stand to aid in shipping, storage & display

Heavy ¹/₄" thick beveled spindle guard

Flexible floating hitch

Large laminated tailwheel

SPECIFICATIONS

Hitch:	Cat. I, ASAE quick hitch
Gearbox:	540 R.P.M., 40 H.P.
Deck Thickness:	11 gauge
Deck Depth:	7 ¹/₂"
Side Skids:	Full length
Tailwheel:	3 ³/₄" X 15" laminated
Cutting Height:	1" to 9"
Blade Size:	½" X 3"
Blade Pin:	1 ¹/₂" diameter
Driveshaft:	Shear pin protection or slip clutch

Round back design

Model #	Cutting Width	Overall Width	Overall Length	Blade Tip Speed- FPM	Weight
RC200-48	48"	52"	85"	13,090	510 lbs.
RC200-60	60"	63"	98"	14,335	585 lbs.
RC200-72	72"	76"	110"	14,955	710 lbs.

Warning: If operating mower near roads and/or where people are present, you must equip mower with deck shielding.