

FLAIL SHREDDERS

"SFG" SERIES

DISCOVER THE POWER OF VERSATILITY.

Our SFG Series of Flail Mower/Shredders feature fixed center mount, manual or hydraulic side shift. The narrow shredders are fixed center mount. The two largest shredders are manual offset, return to center with optional hydraulic offset. Two style of blades can be purchased, hammer knives or double Y blades. These blades are also interchangeable on the same shredders. The low profile design of the machine aids when working in tight areas. These are popular mowers in vineyards, berries, roadsides, weed abatement, rental yards, etc.



MARKETS FOR SFG SERIES

These mower/shredders have a large number of special features, and shredding widths, which makes them very popular in many different markets.



VINEYARDS



ORCHARDS



BERRIES



MUNICIPALITIES




WEED ABATEMENT



RENTAL YARDS

SFG SERIES FEATURES

Of the many popular Flail Shredders we offer, the most successful is our **SFG** Series. This cut away lists the many special features. The heart of the shredders is the unique construction shown below.

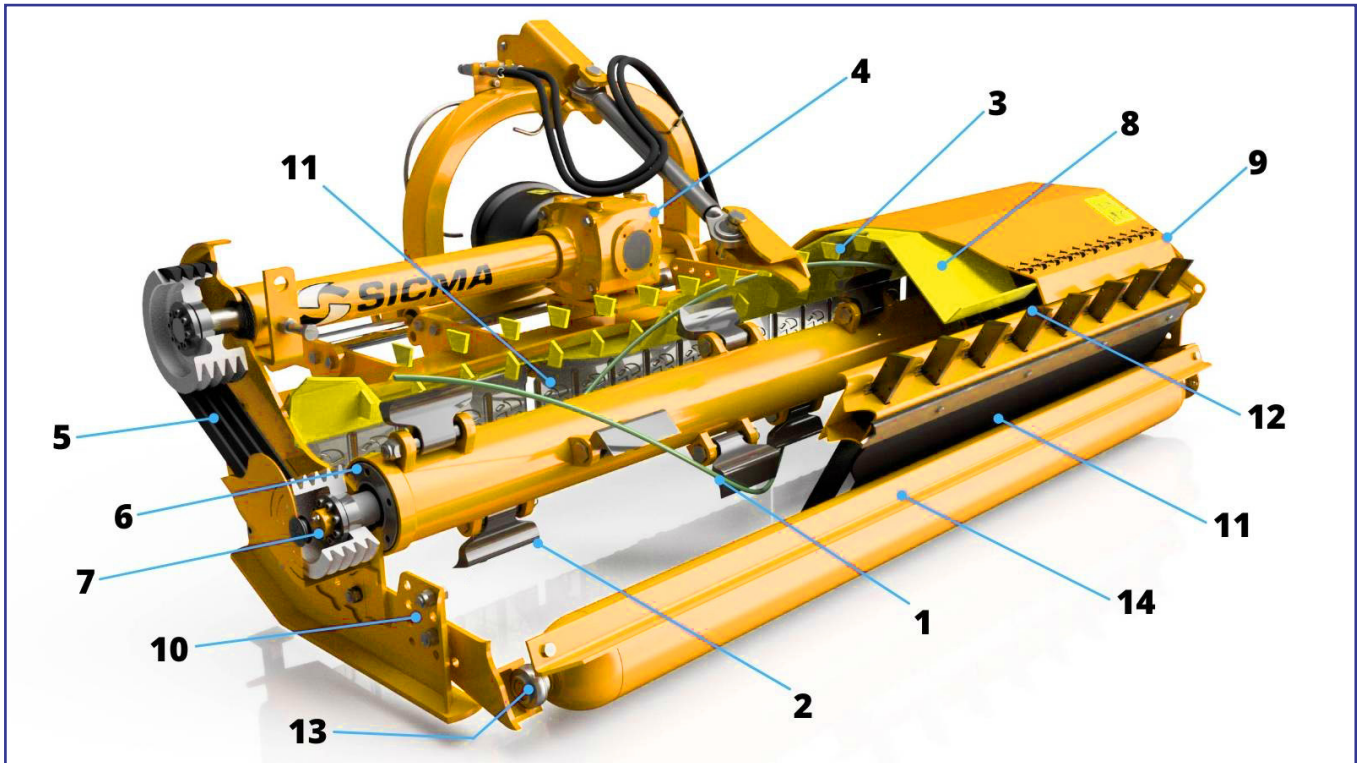

1. Rotorshaft and hammers are precision electronic balanced.
2. High strength boron steel forged hammers or double Y blades.
3. Two rows of heat treated re-cutter blades.
4. 80 horsepower gearbox with overrunning clutch.
5. Belt final drive with tensioner.
6. Rotor bearings with lubricant seals.
7. High resistance self-centering pulleys.
8. Double plated hood assembly.
9. Rounded anti-entanglement outer side panel.
10. Optional Adjustable skids.
11. Front safety chains and optional rubber deflectors.
12. Optional rake teeth to contain material in the body for additional shredding.
13. Self-aligning roller bearing with dirt protection.
14. Optional Rear roller mud scraper.

FLAIL SHREDDERS

FEATURES


- Cat. I A.S.A.E. quick hitch, 540 R.P.M. tractors
- Fixed center mount hitch, except SFG185/200
- 70 H.P. gearbox with built-in overrunning clutch
- Low profile belt housing, 23" high for clearance
- Hammer knives shreds brush and prunings up to 2" diameter
- Double Y blades mow weeds and light brush up to 1" diameter
- Cutting height adjusts from 1" to 4" above ground
- Rotor speed - 2,200 R.P.M.
- Two rows of heat treated re-cutter blades
- Rear hatch adjusts for various types of mowing
- Rear hatch slotted for rake teeth
- Balanced 5 ½" rotor tubing
- 5 ½" diameter rear roller adjusts vertically and horizontally
- 4 belt final drive with automatic spring tension idler to provide maximum power to the rotor
- Series 6 PTO driveshaft
- Front mounted safety chain, rear rubber deflector

OPTIONS

- Rake teeth



Hammer knife



Double Y blade


SPECIFICATIONS

Model #	Working Width	Overall Width	Maximum Offset*	No. of Hammers	No. of Y Blades	H.P. Req'd	Rake Slots	Weight
SFG95	38"	43"	-	8	32	20	6	620 lbs.
SFG125	49"	55"	-	8	32	25	8	730 lbs.
SFG140	55"	61"	-	10	40	30	9	770 lbs.
SFG155	61"	67"	-	10	40	35	10	840 lbs.
SFG185*	73"	78"	44"	12	48	40	12	1,005 lbs.
SFG200*	79"	84"	48"	14	56	45	13	1,100 lbs.


*These shredders come with manual offset, hydraulic offset is optional. Offset shown is the maximum offset from centerline of tractor to the right.



Rotorshaft, hammer knives and recutter blades



Low profile belt housing for operating in close areas



Adj. rear hatch, open for mowing grass & weeds, close for brush