
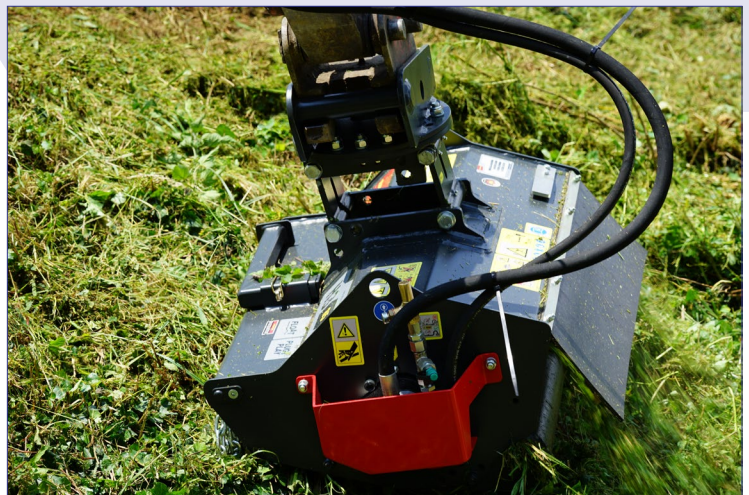


H3 DIRECT FLAIL MULCHERS

FOR MOUNTING ON COMPACT EXCAVATORS

CONQUER THE UNREACHABLE WITH OUR FLAIL MULCHERS.

These Flail Mulchers are ideal for grasses and brush that are difficult to reach, like edges of roads and riverbanks. These units shred material up to one inch in diameter. The Mulchers are very productive even with the low hydraulic power required. The hood is made of wear resistant steel. The adjustable rear roller is reinforced and the floating mount adapter are standard equipment. These mulchers are strong, yet light weight for better control. Available cutting widths of 25 & 33 inch.

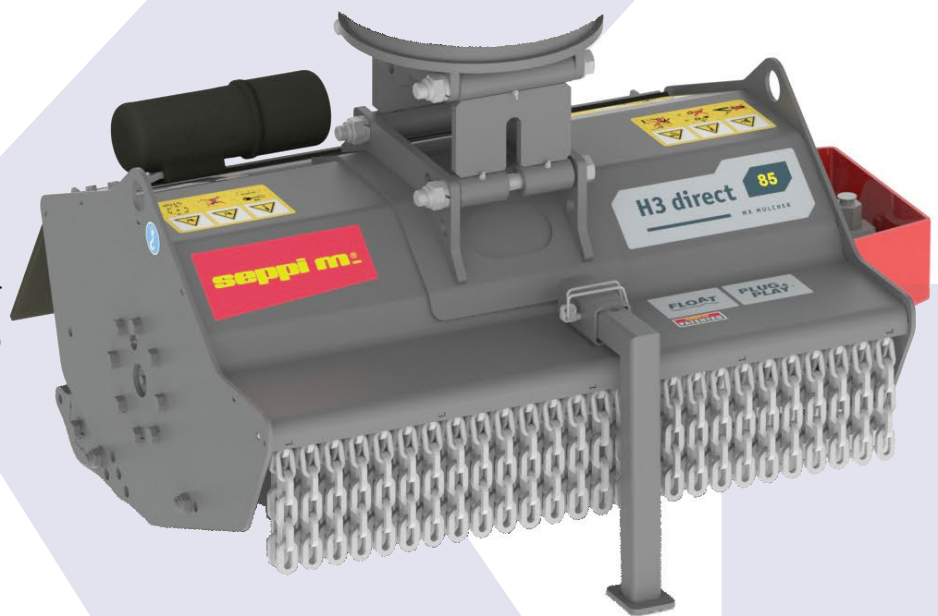



FLAIL MULCHERS


FEATURES

- Mounts to compact excavators and other types of hydraulic booms
- For excavators weights of 4,400 to 11,000 pounds
- Mulches grass and brush up to 1 inch
- With direct drive it eliminates the risk of failure due to wear-related belt breakage
- H3 directly couples to hammer line so no case drain is needed
- Required hydraulic flow - 6 to 16 gallons per minute
- Hydraulic pressure 1,450 to 3,625 PSI
- Hood is made of high tensile, wear resistance AR400 steel
- Floating adapter mount to follow the contours of the ground
- Adjustable rear roller with reinforced bearings
- Front mounted safety chains
- Rear mounted safety rubber flaps
- With hoses



OPTIONS

- Hydraulic rotation plate 190°
- Heavy duty models available to mulch material up to 16 inch diameter

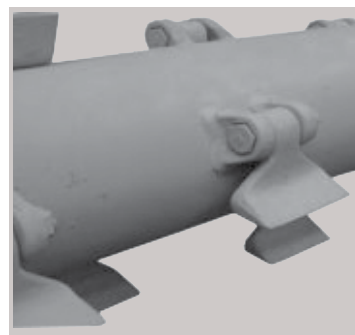

SPECIFICATIONS

Model #	Working Width	Overall Width	Depth	Number of Hammers	Weight
H3-Direct 60	25"	30"	31"	6	300 lbs.
H3-Direct 85	33"	40"	31"	9	360 lbs.



FORM #SE0709-26

13477 Benson Ave. Chino, CA 91710 | 909/548-4848 | sales@gearmore.com