

DISCOVER MORE OF OUR PRODUCTS HERE->



FLAIL MULCHERS

SERIES "S9C"

RELIABLE, EFFICIENT, AND POWERFUL PERFORMANCE.


This Flail Mulcher has a unique hydraulic side shift system that moves horizontally on front and rear mounted heavy steel tubes. These units were designed for high usage with limited maintenance. This is achieved by a number of special features such as - high tensile steel hood, internal hood replaceable "Hardox" wear plates, replaceable drop forged re-cutter bars and large 150 horsepower gearbox. The adjustable rear rubber guard hatch can be closed for maximum shredding or open for maximum speed up to 6 miles per hour.





FLAIL MULCHERS

SPECIAL FEATURES

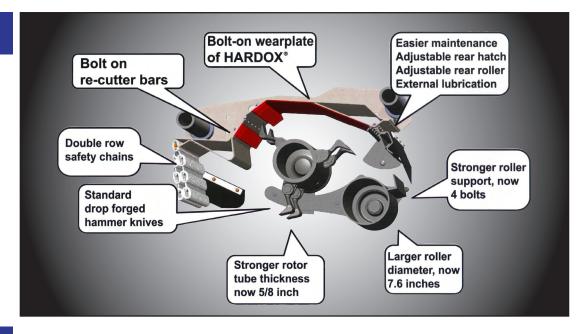

FEATURES

- Cat. II, 540 R.P.M. hydraulic offset
- 150 H.P. gearbox with overrunning clutch
- Hydraulic offset 27 inches
- Mulches grass and prunings up to 3 ½"
- Working speeds up to 6 miles per hour
- 5 belt final drive
- Drop forged hammer knives
- Hood assembly made of high tensile steel

OPTION

■ 1,000 R.P.M. gearbox

- Replaceable drop forged re-cutter bars to increase material shredding
- Adjustable rear hatch closed for maximum shredding, open for maximum speed
- Strong %" thick rotor tubing
- Rotor bearings are double self-aligning
- Large 7.6" diameter adjustable rear roller
- Heavy steel final drive
- Front mounted double row of safety chains and rear mounted rubber guards

SPECIFICATIONS

Model #	Shredding width	Overall Width	Max. Offset Rt. of Centerline	Overall Height	No. of Knives	Min. H.P. Required	Total Weight
S9C-200	79"	85"	56"	41"	21	75	1,940 lbs.
S9C-225	89"	95"	65"	41"	24	80	2,120 lbs.
S9C-250	98"	100"	75"	41"	27	85	2,260 lbs.

