



VIEW VIDEO



VIEW CATALOG

MINIFORST PICK-UP CL MULCHER

PRODUCT

**PICK-UP MULCHER,
SKID STEER MOUNT, HYDRAULIC DRIVEN**



Our **Miniforst Pick-Up CL Mulcher** was developed for shredding large piles of branches. The unit features a hydraulic driven ground level pick-up rotor and hydraulic adjustable upper rotor. The design allows for picking up small branches and large limbs up to 8 inches in diameter. The prunings are then fed into the shredding rotor to produce a fine and uniform mulch. This results in a fast biodegradation to the soil. The Pick-Up Mulcher is particularly suitable for orchards, vineyards and other applications.



QUALITY ASSURANCE

MINIFORST PICK-UP MULCHER IN ACTION

The automatic floating hood when closed creates optimal mulching conditions. When open it allows the Mulcher to tackle high piles of brush.





AFFORDABILITY

MINIFORST PICK-UP CL UNIQUE FEATURES



"Patented" rotor, hammers w/tungsten carbide tips



Heavy duty, 4 tires 18 x 7 - 8 ply




Pressure gauges for rotor and pick-up



In cab controls for hood/pick-up



Upper pick-up rotor, self cleaning

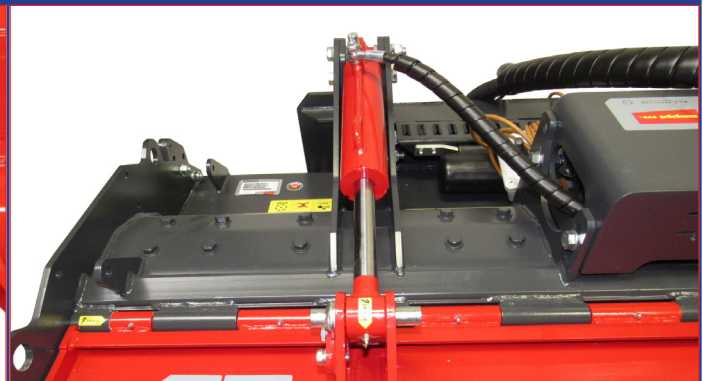


Cylinder for raising upper feed rotor/hood



GET READY TO GEAR UP

MINIFORST PICK-UP CL

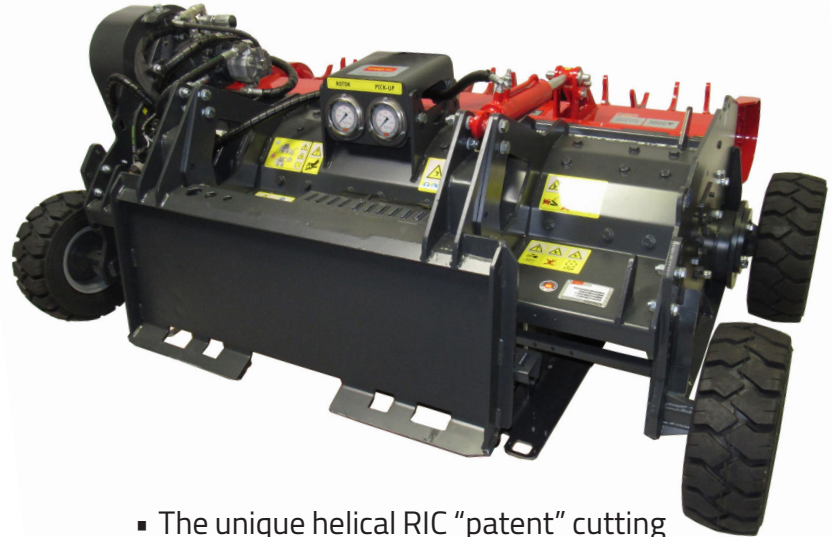

FEATURES

- Mulches wood up to 8" in diameter
- Chassis and radial rotor sections made of wear resistant steel AR400
- SAE skid steer attachment interface
- Transmission with 5 belts
- Variable displacement motor 24 - 42 G.P.M. with relief valve
- 150 - 300 bar, 2,175 - 4,350 PSI
- 2 large gauges readable from the track loader. One for shredding rotor pressure, one for the pick-up rotor pressure
- Two pick-up rotors, each rotor with motor and hydraulic system
- Floating hood with hydraulic cylinder, closed creates optimal crushing conditions; open the hood when high piles of wood occurs
- The unique helical RIC "patent" cutting rotor only allows smaller chips to be cut resulting in continuous high rotor speed for higher efficiency
- The super mono tip hammers with tungsten carbide tips increase the life of the hammers and only require an impact driver to change the hammers out
- 4 rows of replaceable tempered counter cutters
- 4 rubber gauge wheels, adjustable in height
- Hoses with quick coupling mulcher loader connection "flat face ISO16028"
- On board power supply 12V in cab plug required

SPECIFICATIONS

Model #	Working Width	Overall Width	Overall Height	No. of Hammers	Weight
Miniforst Pick-Up CL175	69"	99"	39"	33	3,530 lbs.

Safety Note: Unit may be raised to a maximum of 20" and should only be used with stone impact protected cabins.



FORM #SE0716-25

13477 Benson Ave. Chino, CA 91710 | 909/548-4848 | sales@gearmore.com