




Explore more of our products by clicking or scanning here!→



# R20 PICK-UP CL MULCHER

## PRODUCT

**PICK-UP MULCHER,  
SKID STEER MOUNT, HYDRAULIC DRIVEN**



VIEW VIDEO



Our **R20 Pick-Up CL Mulcher** was developed for shredding large piles of branches. The unit features a hydraulic driven ground level pick-up rotor and hydraulic adjustable upper rotor. The design allows for picking up small branches and large limbs up to 8 inches in diameter. The prunings are then fed into the shredding rotor to produce a fine and uniform mulch. This results in a fast biodegradation to the soil. The Pick-Up Mulcher is particularly suitable for orchards, vineyards and other applications.

## R20 PICK-UP MULCHER IN ACTION

The automatic floating hood when closed creates optimal mulching conditions. When open it allows the Mulcher to tackle high piles of brush.




## R20 PICK-UP CL UNIQUE FEATURES

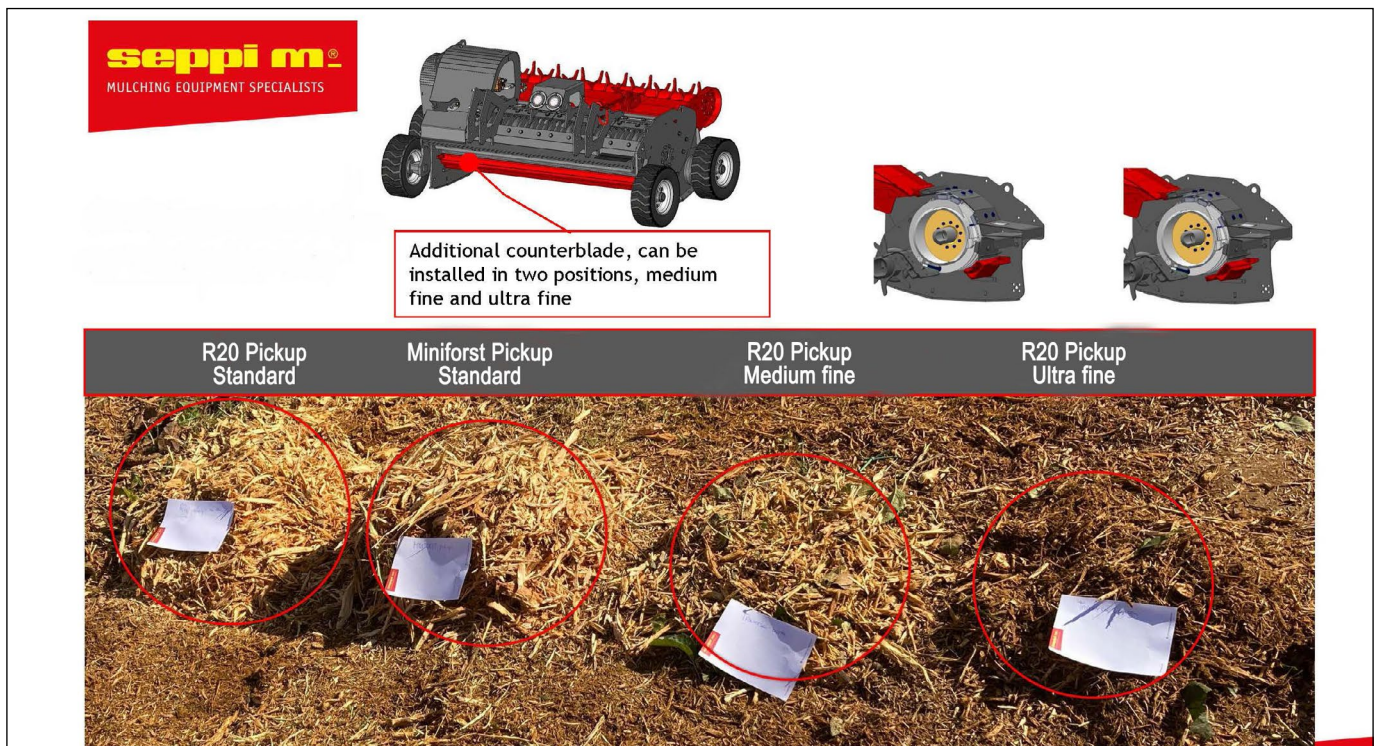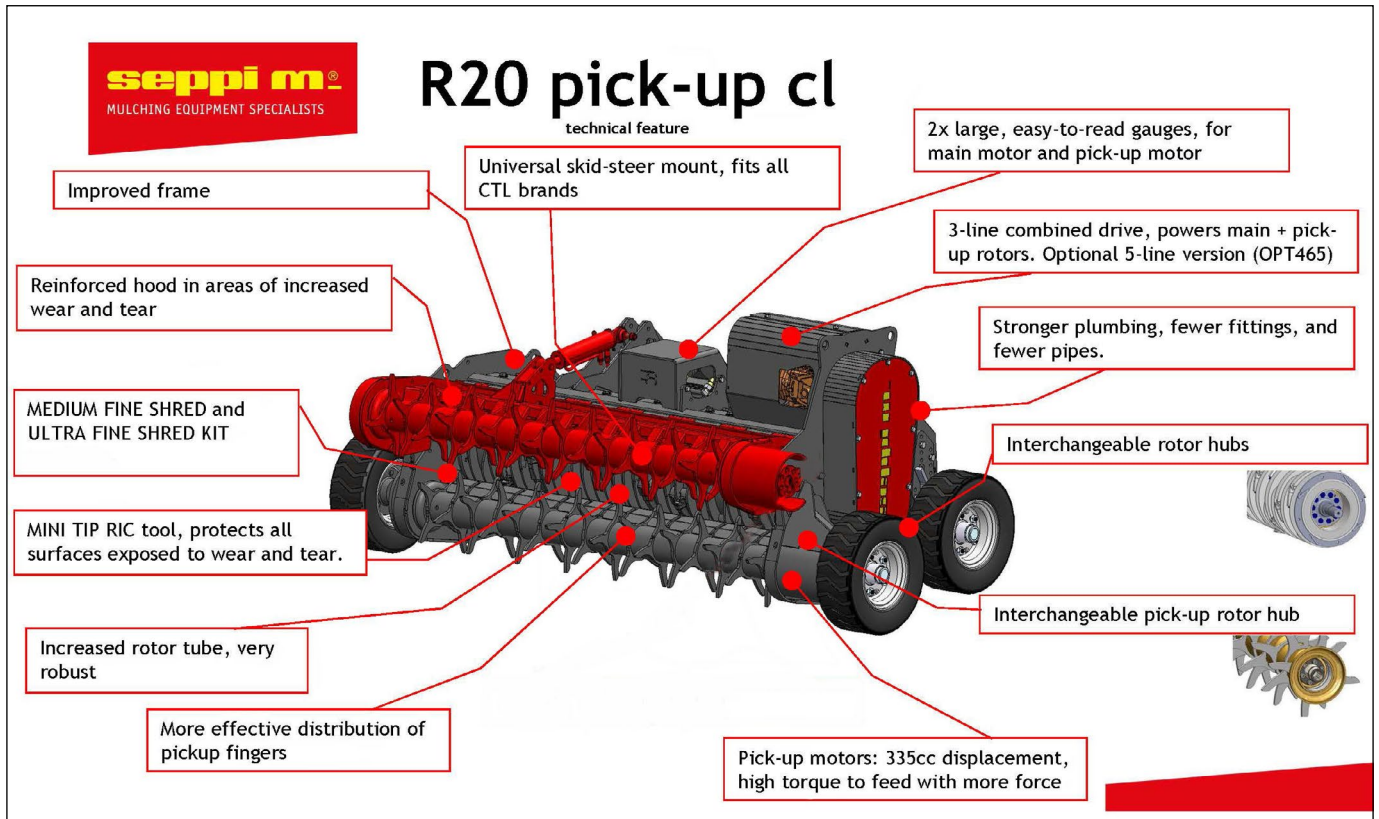

## R20 PICK-UP CL

### FEATURES

- ◆ Mulches wood up to 8" in diameter
- ◆ Chassis and radial rotor sections made of wear resistant steel AR400
- ◆ SAE skid steer attachment interface
- ◆ Transmission with 5 belts
- ◆ Variable displacement motor 38 - 42 G.P.M. with relief valve 150 - 300 bar, 2,175 - 4,350 PSI
- ◆ 2 large gauges readable from the track loader. One for shredding rotor pressure, one for the pick-up rotor pressure
- ◆ Two pick-up rotors, each rotor with motor and hydraulic system
- ◆ Floating hood with hydraulic cylinder, closed creates optimal crushing conditions; open the hood when high piles of wood occurs

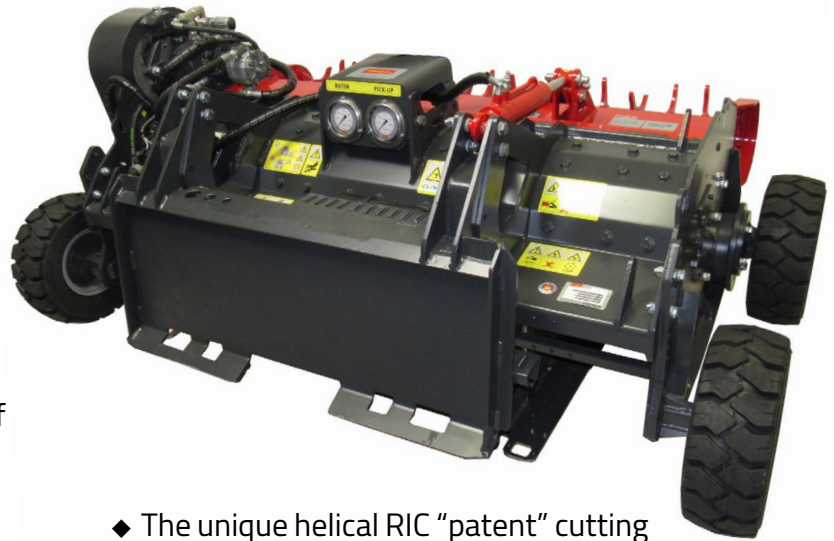

- ◆ The unique helical RIC "patent" cutting rotor only allows smaller chips to be cut resulting in continuous high rotor speed for higher efficiency
- ◆ The super mono tip hammers with tungsten carbide tips increase the life of the hammers and only require an impact driver to change the hammers out
- ◆ 4 rows of replaceable tempered counter cutters
- ◆ 4 rubber gauge wheels, adjustable in height
- ◆ Hoses with quick coupling mulcher loader connection "flat face ISO16028"
- ◆ On board power supply 12V in cab plug required
- ◆ Medium and ultra fine shred kits

### OPTION

- ◆ 465 M-Boost Motor & carbon chain gear belt drive 40 -63 G.P.M., 150 - 400 bar, 2,200 - 5,800 PSI (5 Line units must have auxiliary hydraulic circuit)

### SPECIFICATIONS

| Model #                  | Working Width | Overall Width | Overall Height | No. of Hammers | Weight     | Recommended Prime Mover Weight |
|--------------------------|---------------|---------------|----------------|----------------|------------|--------------------------------|
| R20 Pick-Up CL175        | 69"           | 99"           | 41"            | 33             | 3,530 lbs. | 8,400 lbs.                     |
| R20 Pick-Up CL200        | 79"           | 109"          | 41"            | 39             | 3,900 lbs. | 11,000 lbs.                    |
| R20 Pick-Up CL175-5 line | 69"           | 99"           | 41"            | 33             | 3,530 lbs. | 8,400 lbs.                     |
| R20 Pick-Up CL200-5 line | 79"           | 109"          | 41"            | 39             | 3,900 lbs. | 11,000 lbs.                    |

Safety Note: Unit may be raised to a maximum of 20" and should only be used with stone impact protected cabins.