




Built By:

BWImplement

DISCOVER MORE OF OUR PRODUCTS HERE→



RIDGERS/RIDGER BLOCKERS

FEATURES

- Cat. II, 3-point A.S.A.E. quick hitch
- 4" x 6" x 1/4" wall x 8' long toolbar
- Gangs adjust for tilt and pitch
- Self aligning trunnion 1 1/2" bearings
- Available in 3 or 4 blade
- Blades on 9" centers with cast iron spacers
- Parking stand
- Optional mud scrapers

Adjustable gangs




SPECIFICATIONS

Model #	Description	Req'd Horsepower	Weight
BE222-3	3 blade ridger w/22", 24" & 26" blades	60 minimum	1,000 lbs.
BE422-4	4 blade ridger w/22", 24", 26" & 28" blades	60 minimum	1,080 lbs.

FEATURES

- Ridger specifications same as above
- Blocker frame - 4" x 6" x 1/4" wall
- Toolbars are 8 or 9 feet long
- Blocker width 24" with 3/8" x 4" replaceable plow steel edge
- 3 1/2" x 8" depth control hydraulic cylinder with hoses

Built for heavy duty use

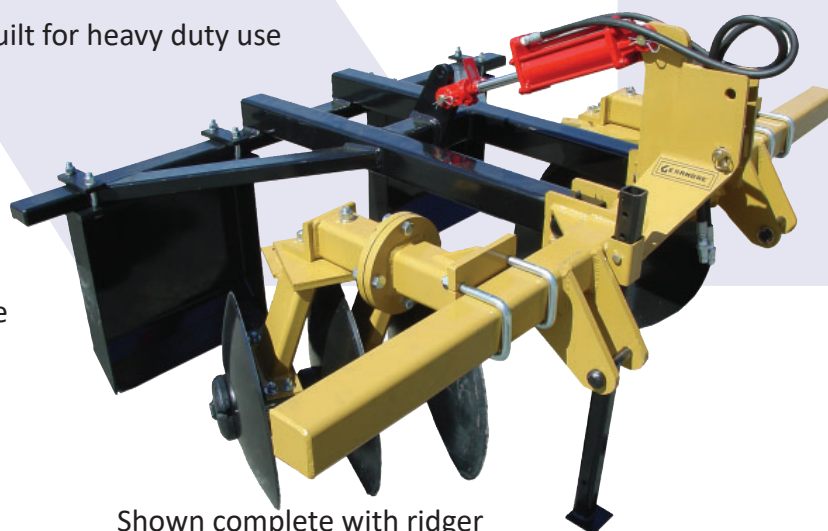

Shown complete with ridger

SPECIFICATIONS

Model #	Description	Req'd Horsepower	Weight
BE222-3B	Complete 3 blade ridger w/blockers	60 minimum	1,200 lbs.
BE422-4B	Complete 4 blade ridger w/blockers	60 minimum	1,280 lbs.



FORM #BW0025-25

13477 Benson Ave. Chino, CA 91710 | 909/548-4848 | sales@gearmore.com