


PENDULUM SPREADERS TO ACHIEVE THE MOST ACCURATE PLACEMENT OF FERTILIZERS AND SEEDS



Model PDV500

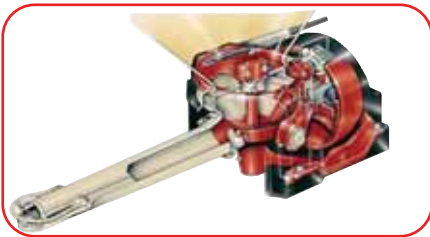

Our line of pendulum spreaders feature exact rate/spread control, quick change spouts, low filling heights and easy maintenance. These spreaders are very accurate and the pendulum movement of the spout back and forth insures that the application rate is always identical on both sides. The pendulum system also achieves accuracy as the material is spread only to the rear of the spreaders thus wind becomes less of a factor. Using the reference chart on the hopper, you simply turn the dial on the adjusting rod to the required pounds per acre. These versatile spreaders are popular for orchards, vineyards, turf, and general farm applications.



Model PDC400

FEATURES:

- 3-Point hitch, 540 R.P.M.
- Corrosion free, molded fiberglass hoppers, except PDC400
- Model PDC400 has a poly hopper
- Capacities of 925 to 2000 pounds
- Maximum spread width - 46 feet
- Stainless steel base and opening shutters
- Steel tubing main frame
- Easy to adjust rates settings
- Mechanical agitator at base of hopper
- Frame is powder coated with baked on paint



Easy to adjust lbs/acre by simply turning the dial.

OPTIONS:

- ~ Secondary agitator to prevent bridging
- ~ Hydraulic cylinder to control off and on from tractor
- ~ 4 Optional spouts to obtain exact spread widths



Optional hydraulic cylinder controls



*304.101 Spout
Full Field Spreading
13 to 26 Feet*




*304.102 Spout
Narrow Spreading
3 to 14 Feet*



*304.103 Spout
Vineyard Spreading
6 to 13 Feet*



*304.105 Spout
Vineyard/Orchard
6 to 33 Feet*

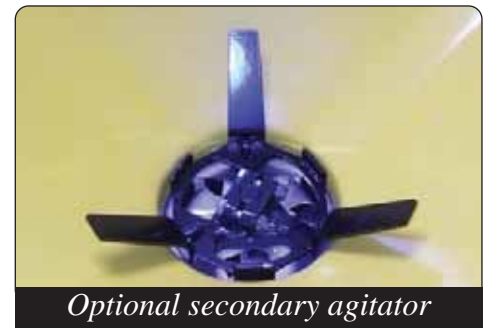

Optional secondary agitator

MODEL NO.	HITCH CATEGORY	CAPACITY		OVERALL WIDTH	OVERALL HEIGHT	WEIGHT
		LBS.	CU. FT.			
PDC400	Cat. 1	925 lbs.	13.6 cu. ft.	46"	47"	225#
PDV500	Cat. 1 & 2	1155 lbs.	17 cu. ft.	54"	36"	290#
PDV600	Cat. 1 & 2	1450 lbs.	20.5 cu. ft.	54"	40"	315#
PDHV800	Cat. 2	2000 lbs.	32 cu. ft.	74"	40"	375#