




Explore more of our products by clicking or scanning here!→



TRAILER DUSTER

FOR HIGH PRODUCTION SULFUR DUSTING



Shown with optional 2 row boom



**THE SMART CHOICE
FOR PRECISE EFFICIENT
DUST DISTRIBUTION
ACROSS EVERY FIELD.**

Our Trailer Dusters have a number of unique features such as: an electro-cylinder with control box for opening flow shutter from the tractor. Also, hydraulic motor with flow control to adjust the speed of the full length spiral conveyor and agitation system. This insures uniform, accurate distribution of the dust. The high capacity 1,000 pound capacity hopper greatly reduces the fill ups. The duster is compact and easy to maneuver even in narrow rows.



TRAILER DUSTER

FEATURES

- Heavy gauge steel hopper with up to 1,000 lb. capacity
- Large hopper opening with hinged lid for easy re-fills
- High performance, precision balanced, all-steel centrifugal turbine fan
- Built-in overrunning clutch protects the drive train
- Swivel distribution nozzles adjust for vines and trees
- Tongue length and tire width are adjustable
- Heavy duty clevis hitch
- Screw adjustment tongue jack
- Wide angle constant velocity driveshaft
- Adjustable rear bumper shields the distribution heads from impact and possible damage
- All steel parts are undercoated with anti-corrosive paint and finish coated
- Application rates from 5 to 100 lbs. per acre
- 8 gallon fresh water tank for hands and face
- Special domed trash screen
- For 540 R.P.M. tractors
- Variable speed hydraulic driven agitator & feed system (flow rate control .1 - 6.0 G.P.M. - R.P.M. speed 13 - 68)
- Electro hydraulic cylinder for opening and closing flow shutter

OPTIONS

- Distribution head for dusting 4 half rows
- Distribution head with hydraulic boom for dusting 2 complete rows - 6 to 10 feet

SPECIFICATIONS


Model #	Capacity	Min. H.P.	Volume of Air	Air Speed	Height	Width	Length	Tires	Weight
MAXI 600-SPC	1,000 lbs.	40	3,180 C.F.M.	420 M.P.H.	50"	50" to 68"	110"	9.5L x 15 - 8 ply	940 lbs.



Variable speed hydraulic driven agitator & feed system



Electro hydraulic cylinder for adjusting flow rate

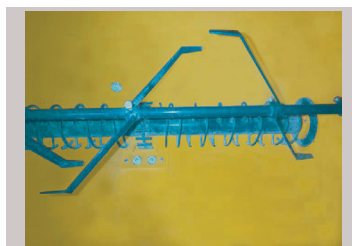

Full length spiral conveyor & agitation arms



FORM #TU0006-25

13477 Benson Ave. Chino, CA 91710 | 909/548-4848 | sales@gearmore.com