

**Effectively Chips Branches Up To 4 1/2" In Diameter****FEATURES:**

- ❑ Cat. I A.S.A.E. 3-point quick hitch
- ❑ 4 Special "chipper steel" reversible knives
- ❑ Adjustable 4 way positioning heat treated cutter bar
- ❑ Heavy 1/4" thick plate in chipper housing
- ❑ Balanced flywheel plate machined from steel plate
- ❑ The top half of the chipper housing swings open and the belt guard is easily removed for maintenance
- ❑ 360 Degree rotating 6" diameter discharge chute
- ❑ Large support stand for stability when operating chipper
- ❑ Heavy duty 540 RPM driveshaft with overrunning clutch


This 4 1/2" capacity PTO driven chipper is gravity fed. The chipper is a smooth running, compact unit; productive and affordable. Chipper is built with thick steel to prevent vibration and smooth operating even with hard wood. Also engineered to provide easy access for maintenance. The chipper is the all-in-one solution for agricultural, landscaping and property maintenance.

**SPECIFICATIONS:**

<b>MODEL NUMBER:</b>	<b>420</b>
Mounting:	Cat. I, 3-pt.
Power Source:	PTO
Chipping Capacity:	4 1/2"
Horsepower Required:	20 - 30 HP
Feed System:	Gravity
Feed Rate:	D.N.A.
Flywheel:	1 1/4" x 20" Dia.
Chipping Knives:	4
Depth:	60"
Width:	45"
Height, includes Discharge:	90"
Feed Table Height:	42"
Weight:	660#

## Hydraulically Feed Branches Up To 5 1/2" Diameter

Our **Hydraulic Power Feed Chipper** quickly turns branches into usable mulch. The chipper was developed for a maximum capacity of 5 1/2" wood as anything larger is usually considered firewood. For safety, an easily reachable control rod gives the feed system instant forward, stop and reverse. The four knife flywheel was developed for smooth operation and finer cut chips. The chipper also offers a number of added value features not available from most competitive machines such as: safety overrunning driveshaft clutch to prevent damage to the chipper and tractor, A.S.A.E. category I quick hitch for a faster and safer 3-point connection to the tractor. This chipper is the all-in-one solution for agricultural, landscape and property maintenance.

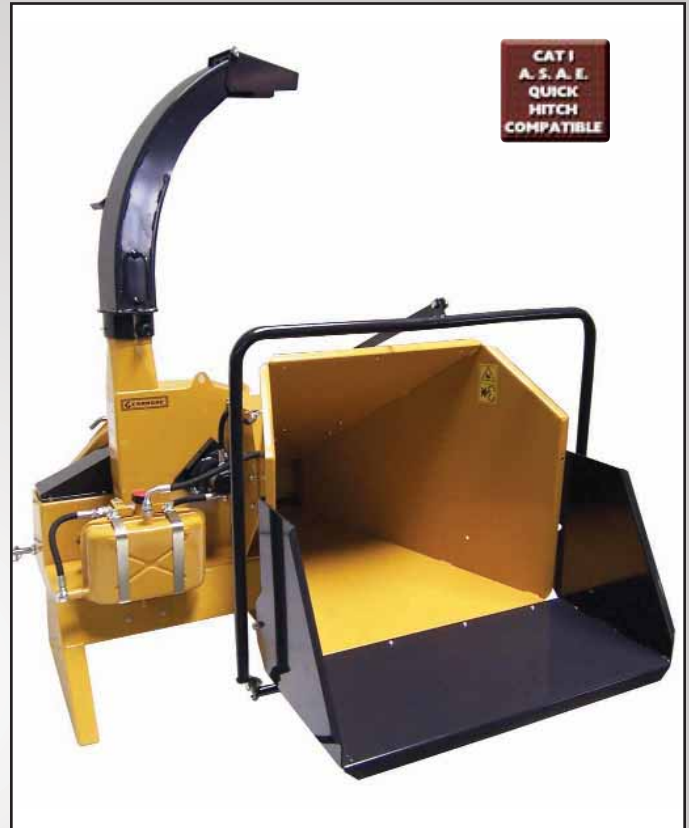

### FEATURES:

- Cat. I, A.S.A.E. quick hitch for easier and safer connection to the tractor
- Speed adjustable hydraulic power feed system
- For 540 RPM tractors from 25 to 80 horsepower
- Safety bar to instantly stop, reverse, and forward the feeding of branches
- 6 1/2" Diameter power feed roll with 10 rows of blades to grab and feed branches
- The spring loaded feed roll slides up and down on two 1 1/4" diameter chrome rods
- Steel oil reservoir tank with replaceable oil filter canister
- 4 Reversible tool steel knives to insure smooth operation and finer cut chips
- Adjustable 4 edge tool steel bed knife
- 4 Flywheel discharge paddles to power out the exiting chips
- 1 1/4" x 20" Diameter heavy 140 pound machined steel flywheel
- Large fixed input hopper - 27" wide by 24" deep
- Hinged blower housing cover for easy access to blades
- Blower feed opening is 5 3/4" wide x 7" high
- 5" x 5" Square 360° tubing discharge chute with reachable lever to adjust and lock position of the deflector
- Safety overrunning clutch on PTO driveshaft to prevent damage to the chipper and tractor

### SPECIFICATIONS:

MODEL NO.	MIN. H.P.	DEPTH	WIDTH	HEIGHT	WT.
520	25	74"	45"	76"	770#